

DIY *Atmosphere light*




LED : OSRAM CREE



REPLACEABLE VERSION

Freely match with different color/type frames.

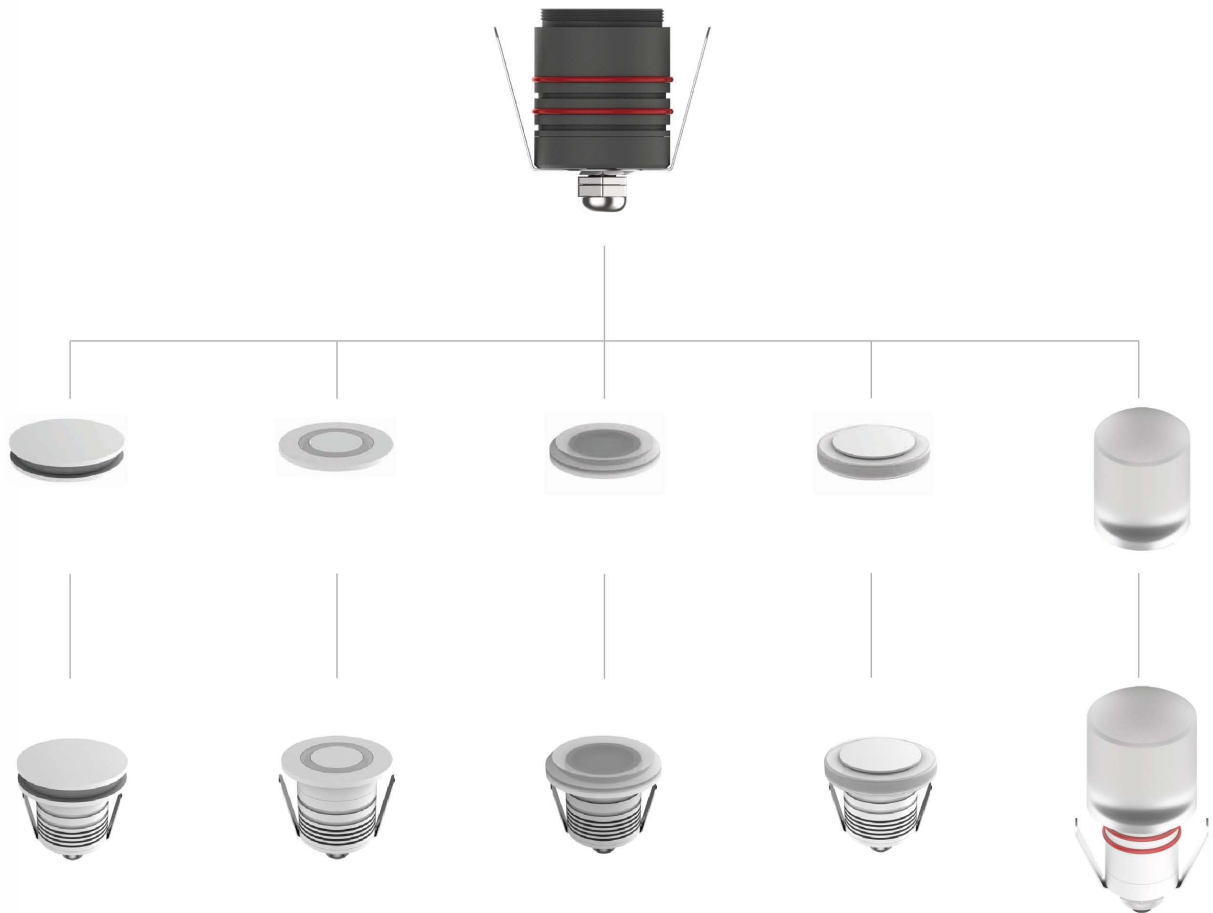

- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself
- Color: White, Silver, Black, Antracit

Appearance Options

Freely match with different color/type frames

1 B1302-01/2 Ø23
B1302-02/2 Ø38



4 B1302-01/5 Ø23
B1302-02/5 Ø38



2 B1302-01/3 Ø23
B1302-02/3 Ø38



5 B1302-01/1 Ø23
B1302-02/1 Ø38



3 B1302-01/4 Ø23
B1302-02/4 Ø38



Delivery standard

- Heat sink and frame deliver dividually, free to DIY.
- Heat sink and frame assembled together , not possible to diassemble.
- Can be used for indoor and outdoor



Assemble box

Contact


BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com


Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com

1

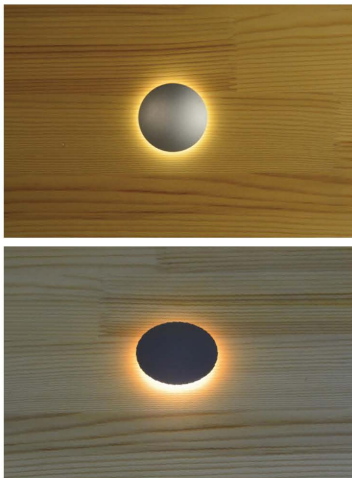

B1302-01/2




- IP Rating: 65
- Optics: Acrylic
- Material : Aluminum



Assemble box


Stainless-Steel 304/316

B1302-02/2




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-01/2	1W/2W	Ø23	Φ 30*35mm	90	////	40lm/w	12V/24V
B1302-02/2	1W/3W	Ø38	Φ 50*52mm	90	////	40lm/w	12V/24V 110V/230V

2

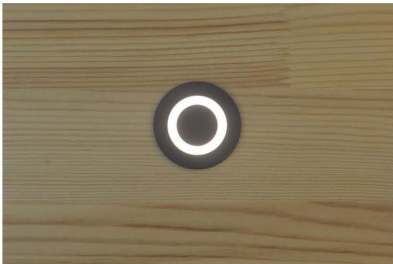

B1302-01/3




- IP Rating: 65
- Optics: Acrylic
- Material : Aluminum



Assemble box

Stainless-Steel 304/316

B1302-02/3



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-01/3	1W/2W	Ø23	Φ 30*35mm	90	////	40lm/w	12V/24V
B1302-02/3	1W/3W	Ø38	Φ 50*52mm	90	////	40lm/w	12V/24V 110V/230V

3




- IP Rating: 65
- Optics: Acrylic
- Material : Aluminum




Assemble box

Stainless-Steel 304/316

B1302-01/4



B1302-02/4



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-01/4	1W/2W	Ø23	Φ 30*35mm	90	350°	70lm/w	12V/24V
B1302-02/4	1W/3W	Ø38	Φ 50*52mm	90	350°	70lm/w	12V/24V 110V/230V

4



- IP Rating: 65
- Optics: Acrylic
- Material : Aluminum




Assemble box


Stainless-Steel 304/316



B1302-01/5



B1302-02/5




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-01/5	1W/2W	Ø23	Φ 30*35mm	90	////	50lm/w	12V/24V
B1302-02/5	1W/3W	Ø38	Φ 50*52mm	90	////	50lm/w	12V/24V 110V/230V

5



B1302-01/1

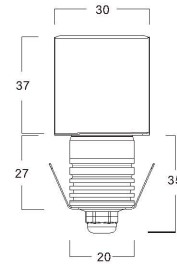


- IP Rating: 65
- Optics: Acrylic
- Material : Aluminum



Assemble box


Stainless-Steel 304/316

B1302-02/1

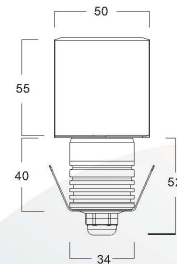

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-01/1	1W/2W	Ø23	Φ 30*35mm	90	350°	60lm/w	12V/24V
B1302-02/1	1W/3W	Ø38	Φ 50*52mm	90	350°	60lm/w	12V/24V 110V/230V

Parallel connection solution

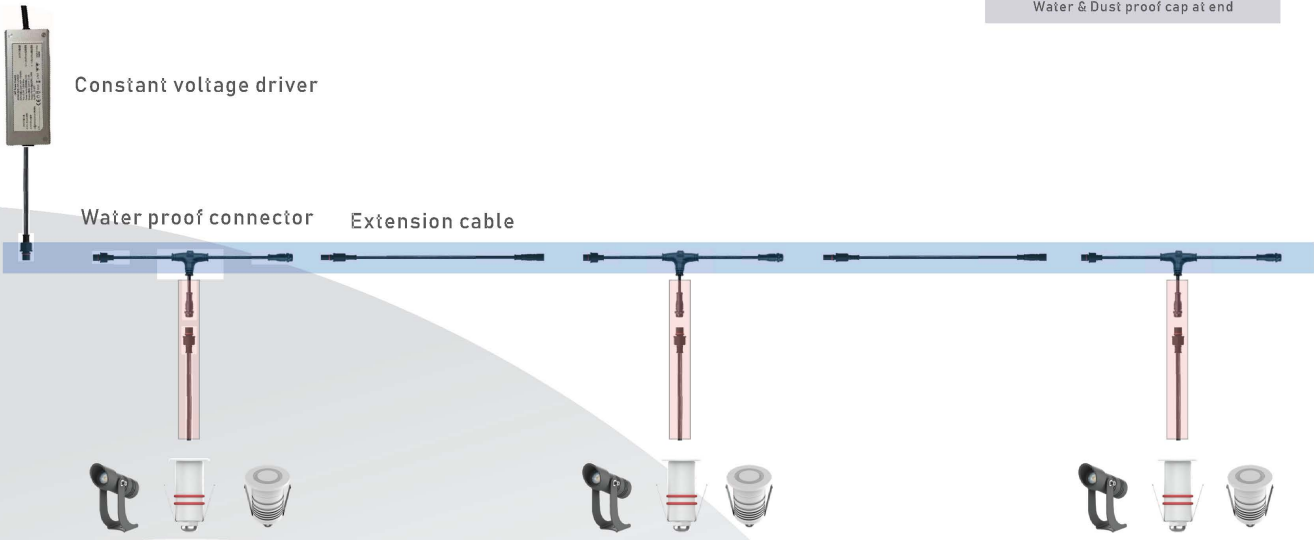

Main-Cable	Standard configuration	1 Meter and 3 Meter
	Max-2.5m ²	10 Meter Main Cable, Maximum Load Wattage 80W
	Max-1.5m ²	10 Meter Main Cable, Maximum Load Wattage 50W
Sub-Cable	Standard configuration	1 Meter Max-0.5m ²



Assemble box

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3, Chaoxing Road Xinhui District JiangMen City, Guangdong Province, China

www.berdisled.com