

# PRODUCTS PROMOTION



SURFACE MOUNTING SPOTLIGHT



## Surface Mounting Spotlight/ indoor

1-1

B0201-03/A 3W  
Size: Ø23\*30mm  
Zoomable  
Dimmable



1-2

B0201-03/B 3W  
Size: Ø23\*30mm  
Dimmable



1-3

B0201-03/C 1.5W  
Size: Ø14\*20mm  
Deep Anti-glare



1-4

B0201-03/D 3W  
Size: Ø20\*43mm  
Deep Anti-glare



2-1

B0201-03/A 3W  
Size: Ø30\*83mm  
Deep Anti-glare  
Internal driver



2-2

B0201-03/A 3W  
Size: Ø30\*113mm  
Deep Anti-glare  
Dimmable  
Internal driver



2-3

B0201-03/C 5W/7W  
Size: Ø45\*105mm  
Deep Anti-glare  
Dimmable/DTW  
Internal driver



3-1

B0201-02/A 3W  
Size: Ø30\*83mm  
Deep Anti-glare  
Internal driver



3-2

B0201-02/B 3W  
Size: Ø30\*113mm  
Deep Anti-glare  
Dimmable  
Internal driver



3-3

B0201-02/C 5W/7W  
Size: Ø45\*105mm  
Deep Anti-glare  
Dimmable/DTW  
Internal driver




## 360° Tiltable Surface Mounting Spotlight

1-1

B0201-03/A



| Power | Lumen | CRI | IP Rating | Beam Angle          |
|-------|-------|-----|-----------|---------------------|
| 3W    | 250lm | 90  | 21        | 10°/15°/24°/38°/60° |




1-2

B0201-03/B (Beam Angle: 15~60°)



| Power | Lumen | CRI | IP Rating | Beam Angle |
|-------|-------|-----|-----------|------------|
| 3W    | 250lm | 90  | 21        | 15~60°     |




## 360° Tiltable Surface Mounting Spotlight/SUPER-MINI

1-3

**B0201-03/C** (Deep Anti-glare)



| Power | Lumen | CRI | IP Rating | Beam Angle          |
|-------|-------|-----|-----------|---------------------|
| 1.5W  | 100lm | 90  | 21        | 10°/15°/24°/38°/60° |




1-4

**B0201-03/D** (Deep Anti-glare)



| Power | Lumen | CRI | IP Rating | Beam Angle          |
|-------|-------|-----|-----------|---------------------|
| 3W    | 230lm | 90  | 21        | 10°/15°/24°/38°/60° |




## 360°Tiltable Surface Mounting Spotlight (Internal driver)



### 2-1 B0201-04/A (Internal driver)




| Power             | Lumen | CRI | IP Rating | Beam Angle  |
|-------------------|-------|-----|-----------|-------------|
| 3W<br>No-Dimmable | 250lm | 90  | 21        | 24°/38°/60° |



### 2-2 B0201-04/B (Internal driver/DIM)




| Power          | Lumen | CRI | IP Rating | Beam Angle  |
|----------------|-------|-----|-----------|-------------|
| 3W<br>Dimmable | 250lm | 90  | 21        | 24°/38°/60° |



### 2-3 B0201-04/C (Internal driver/DIM/DTW)



| Power             | Lumen | CRI | IP Rating | Beam Angle      |
|-------------------|-------|-----|-----------|-----------------|
| 5W/7W<br>Dimmable | 250lm | 90  | 21        | 24°/24°/38°/60° |




## Surface Mounting Spotlight (Internal driver)



### 3-1 B0201-02/A (Internal driver)




| Power             | Size   | Lumen  | CRI | IP Rating | Beam Angle  |
|-------------------|--------|--------|-----|-----------|-------------|
| 3W<br>No-Dimmable | Ø30*83 | 90lm/w | 90  | 21        | 24°/38°/60° |



### 3-3 B0201-02/B (Internal driver)





| Power          | Size    | Lumen  | CRI | IP Rating | Beam Angle  |
|----------------|---------|--------|-----|-----------|-------------|
| 3W<br>Dimmable | Ø30*113 | 90lm/w | 90  | 21        | 24°/38°/60° |



### 3-2 B0201-02/C (Internal driver/DIM/DTW)



| Power             | Size    | Lumen  | CRI | IP Rating | Beam Angle  |
|-------------------|---------|--------|-----|-----------|-------------|
| 5W/7W<br>Dimmable | Ø41*103 | 90lm/w | 90  | 21        | 24°/38°/60° |





## Multiple voltage control schemes


1

### Driverless Trailing edge Dimmable driver solution

- Power : 3W
- PF 0.9
- 2 Years warranty



Dimmable

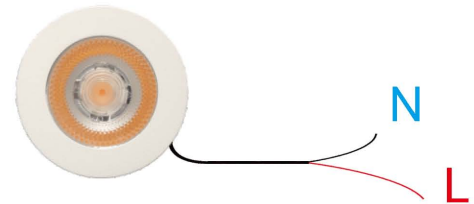

Connect to 110V or 230V

2

### One-To-One External constant current Trailing edge Dimmable driver

- Power : 3W
- PF 0.9
- 5 Years warranty



Trailing edge



Connect to 110V or 230V

Single CCT Solution



CCT Solution

3


### One-To-Six External constant current Trailing edge Dimmable driver

- Power : 6\*3W
- PF 0.9
- 5 Years warranty

#### ONE-TO-SIX DRIVER



Dimmable

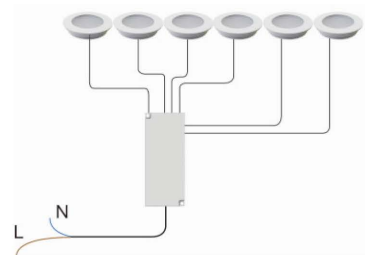


Connect to 110V or 230V

## Multiple voltage control schemes

4

DC10-30V wide range voltage solution

- Power : 1W/3W
- 5 Years warranty

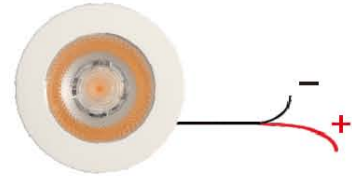


Connect to DC10~30V  
Connect to battery

5

Connect to 12V or 24V Transformer  
Connect to DMX512 Transformer

6

Trailing edge Dimmable driver



Power : 1W/3W  
12V DC/24V DC



7

2.4G Smart Control Dimming

- Power : 36\*1W/12\*3W
- PF : 0.9
- 5 Years warranty
- Remote control
- Brightness Adjust
- Night Light
- 15M,30M,1H Timming Setting
- One driver connect to 36pcs 1W or 12pcs 3W Max. spots

