



Mini Surface Mounting Spotlight

Item NO.:B1402-03/A1 Φ74mm

Power:3W/6W (RGB:Max.4W)

CRI.:90



Beam angle: 15°/24°/36°/60°/25°×45°/30°×60°/90°

Material :304 / 316 stainless-steel

Voltage: DC 12V/24V


IP Rating:68

N.W/pc: 0.5KGS

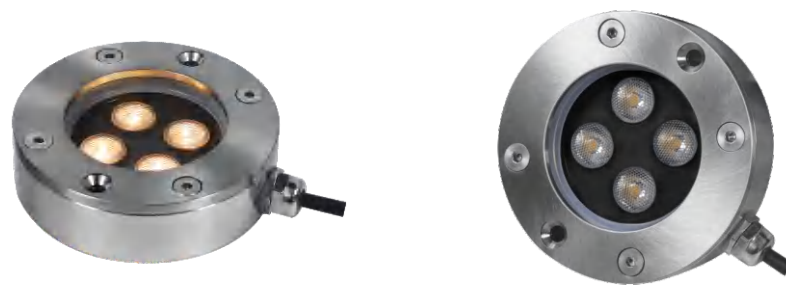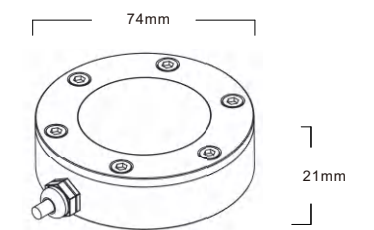

- * Under-water light
- * Stainless-steel material
- * Optical part: lens and Honeycomb Mesh
- * Environment: underwater (0~5M) and abovewater







Mini Surface Mounting Spotlight

Under-water light
Stainless-steel material



Item NO.:B1402-03/A1 Φ52mm

Power:1W/3W(RGB:Max. 1W)

CRI:90


Beam angle:24° /36° /60°/25°×45°/30°×60°/90°

Material :304 / 316 stainless-steel

Voltage:DC 12V/24V


IP Rating:68

* Optical part: lens and Honeycomb Mesh
* Environment: underwater (0-5M) and abovewater

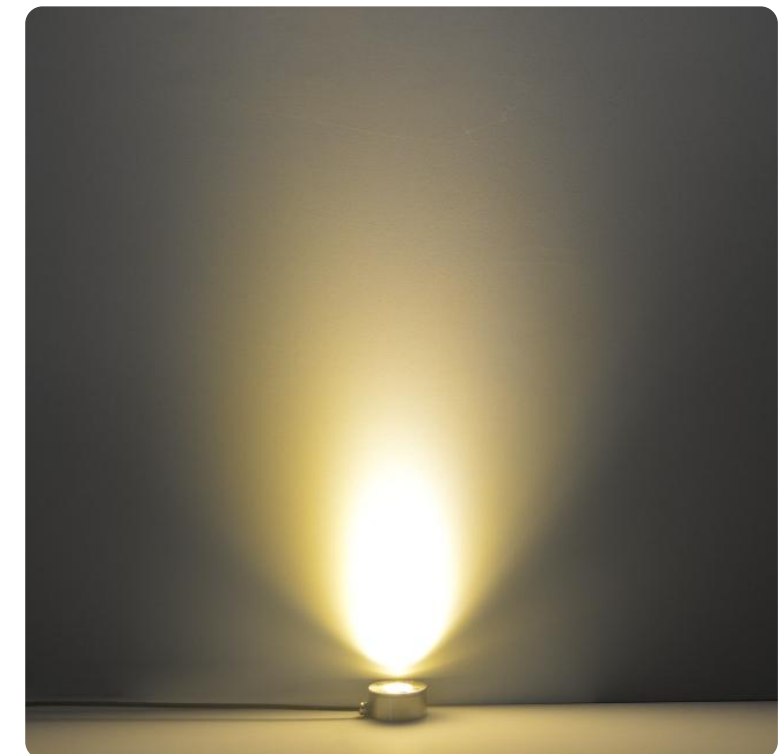

PACKAGING INFORMATION

Carton	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
	52.5*21.5*37	0.31	15	50



FIXTURE COMPATIBILITY

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
1W/3W	III	Ip68	-20 °C~45 °C	0~90%	-20°C~60°C



* Optical part: lens and Honeycomb Mesh
* Environment: underwater (0-5M) and abovewater

Mini Surface Mounting Spotlight

Under-water light
Stainless-steel material



Item NO.:B1402-03/A3 Φ70mm

Power:3W/5W(RGB:Max. 3W)


CRI.:90

Beam angle:24° /36° /60°/25°×45°/30°×60°/90°

Material :304 / 316 stainless-steel

Voltage:DC 12V/24V

IP Rating:68



PACKAGING INFORMATION

Carton	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
	52.5*21.5*37	0.31	15	50

FIXTURE COMPATIBILITY

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
1W/3W	III	Ip68	-20 °C~45 °C	0~90%	-20°C~60°C

