




Cabinet light Mini Indoor Spotlight



- CCT and DTW OPTION
- Voltage: 100~265V ac
- and 12V/24V dc , 9~36V dc
- Multiple beam angle
- Installation height 12 mm
- Additional surface-mounting housing
- Optics: Lens, Reflector, Diffuser
- 5-year warranty

2 TYPES INSTALLATION

- Connect the wire from the inside of the board
- Connect the wire from behind the board
- Ultra-thin and small, can be embed in the board

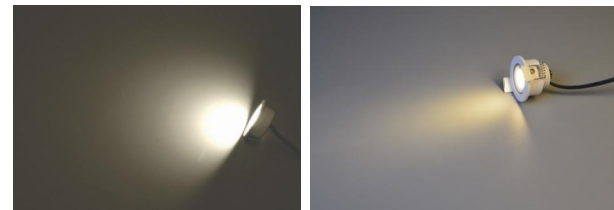

Assemble in ceiling,
No need to cut a hole,
Keep cable in the ceiling



Recessed in ceiling with a hole,
Keep cable behind ceiling




A lamp Freely match with random 2CCT

CCT: R,G,B, and 2000K, 2500K, 2700K, 3000K, 4000K, 6000K


Item NO.: B0110-02/B1 (Reflector)

Power: 1W
Luminous Efficiency: 80lm/w
CRI: 90
Beam angle: 120°
IP Rating: 21/54
Material: Aluminum



Item NO.: B0202-03/A1


Surface mounting housing



Surface mounting housing


Item NO.: B0110-02/B2 (Lens)

Power: 1W/3W
Luminous Efficiency: 70lm/w
CRI: 90
Beam angle: 15/24/38/60°
IP Rating: 21/54
Material: Aluminum



Item NO.: B0202-03/A2

Surface mounting housing



Surface mounting housing






Mini Spotlight Dimmable Driver Integrated

Item NO.:B0110-02/B3




- Power:3W
- CRI.:90
- Beam angle: 120°
- IP Rating: 65
- Luminous Efficiency: 80lm/w
- Material: Aluminum
- Voltage:200~ 240V ac
- Deep dimming, flicker-free
- 3-year warranty



Item NO.:B0202-03/A3

Surface mounting housing



Surface mounting housing



Triac Dimmable

Connect to 230V directly



DRIVER DATA SHEET(Flicker-free Driver)

Wattage	1W/3W	3W	1W/3W
Dimmable	YES	YES	NO
Input rated Voltage	DC12V/24V	AC200-240V	AC100-265V
Frequency	50/60Hz	50/60Hz	50/60Hz
Input Voltage	DC9-36V	AC180-265V	AC90-305V
Efficiency	PASS	≥58%	≥73%
Power Factor	PASS	≥0.9	≥0.5
Rated input current	≤0.05~0.25A	≤0.02A	≤0.02A
Full load output Voltage	DC12V/24V	DC252V	DC14-25V&28-42V
Rated output current	////	20mA	260mA/130mA/70mA
Output current range	////	20mA±1%	260mA/130mA/70mA±5%
Dimming Type	DALI/1-10V/9~36V DC	Trailing edge Dimmable Dimmable Driver Integrated	////
Dimming range	10%-100%		////
Total harmonic distortion (THD)	////	≤20%	
Power tolerance	10%		
Current output tolerance	±5%		
Short circuit protection	PASS		
Over voltage protection	PASS		
Over temperature protection	PASS		

FIXTURE COMPATIBILITY

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
1W/3W	II	IP21/54/65	-20 °C~45 °C	0~90%	-20 °C~55 °C

PACKAGING INFORMATION

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	30*30*23.7	0.1	13	100

