

SUPER-MINI indoor spotlight

LED: **OSRAM** **CREE** 

PRODUCTS PROMOTION

- 1** B0110-02/A1
Size: Ø45*23mm
Anti-glare



- 2** B0110-02/B1
Size: Ø34*12mm
Ultra thin



- 3** B0110-02/B2
Size: Ø34*22mm
Ultra thin flat



- 4** B0110-02/B3
Size: Ø35*34mm
Driver Integrated



SUPER-MINI indoor spotlight



1

B0110-02/A1


Anti-glare




- IP Rating: 54/67
- Power: 3W
- CRI: 90
- Cut-out: Ø35
- Size: Ø45*23mm
- Optics: Lens, Reflector
- Beam angle: 15/24/38/60°
- Material: Aluminum
Stainless-Steel 304/316
- Voltage: 12V/24V 200~240Vac
- Color: Silver, White, Gray, Black, Nickel-brushed, Chrome



CCT OPTION

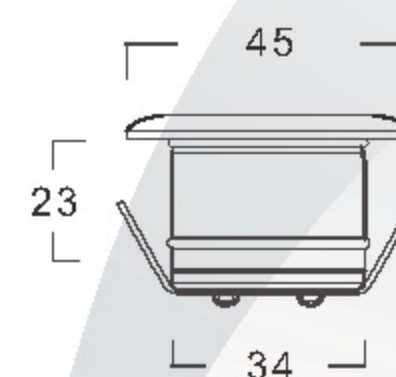

Surface mounting housing

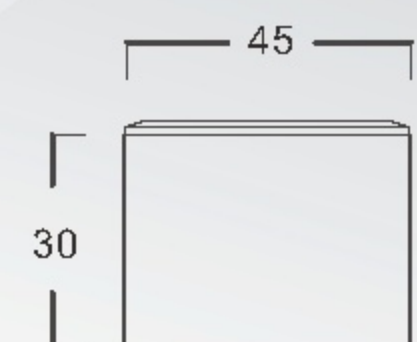

B0202-03-1/B

SUPER-MINI indoor spotlight








2

B0110-02/B1
Ultra thin



- IP Rating : 54
- Power : 3W
- CRI :90
- Cut-out : Ø28
- Size: Ø34*12mm
- Optics: Lens, Diffuser
- Beam angle : 120°
- Material : Aluminum
Stainless-Steel 304/316
- Voltage: 12V/24V 200~240Vac
- Color: Silver, White, Gray, Black, Nickel-brushed, Chrome

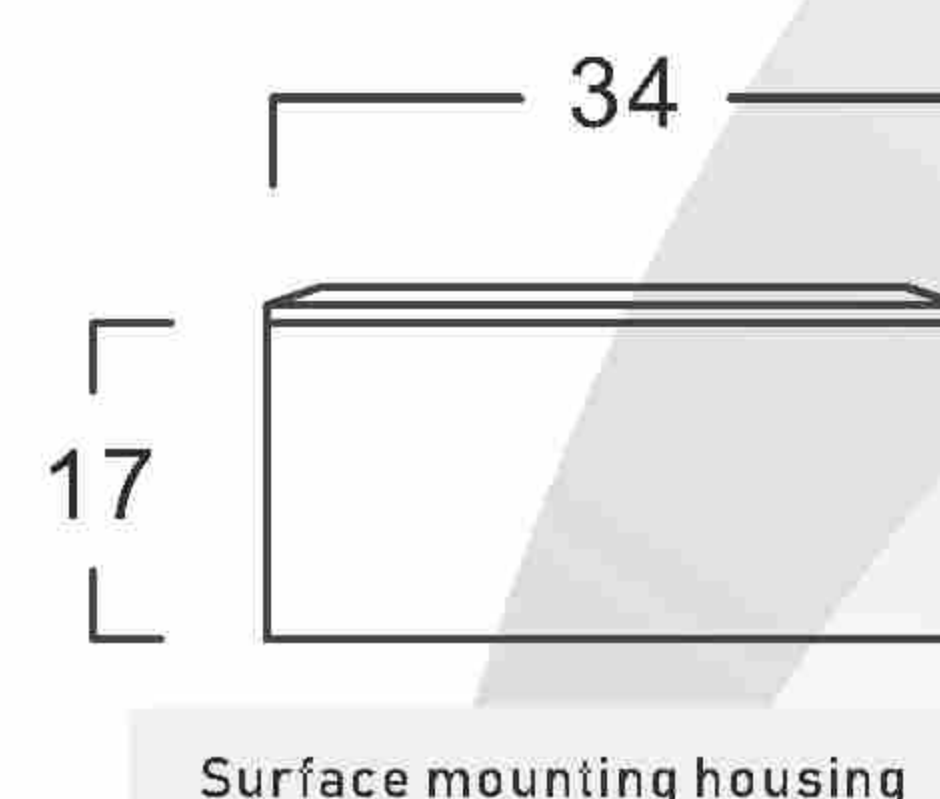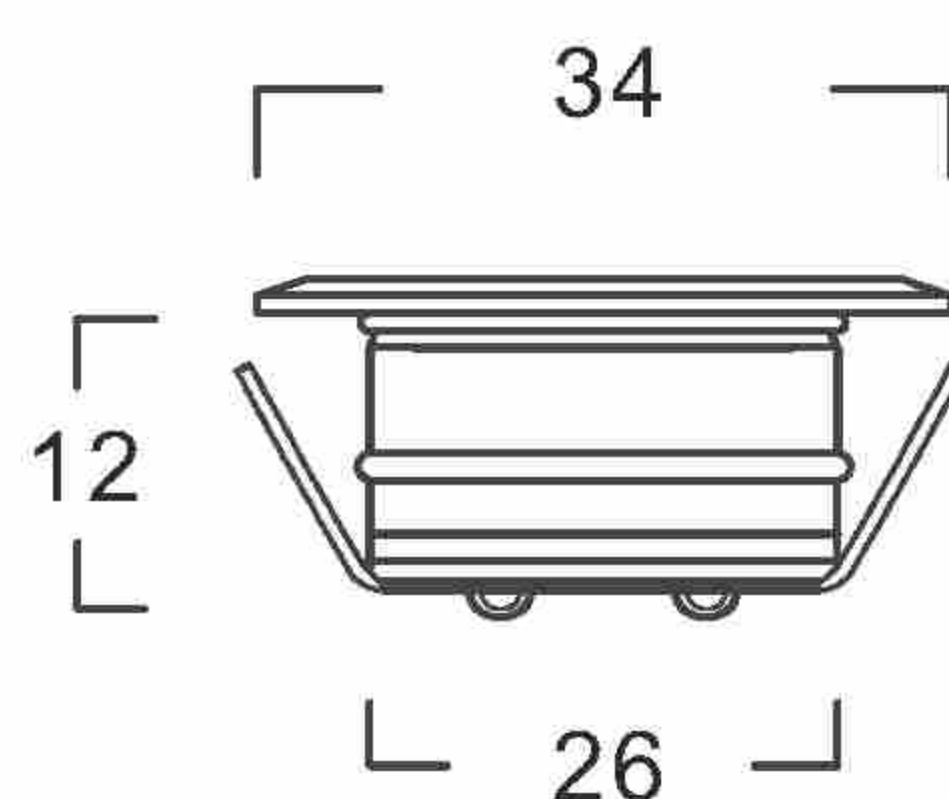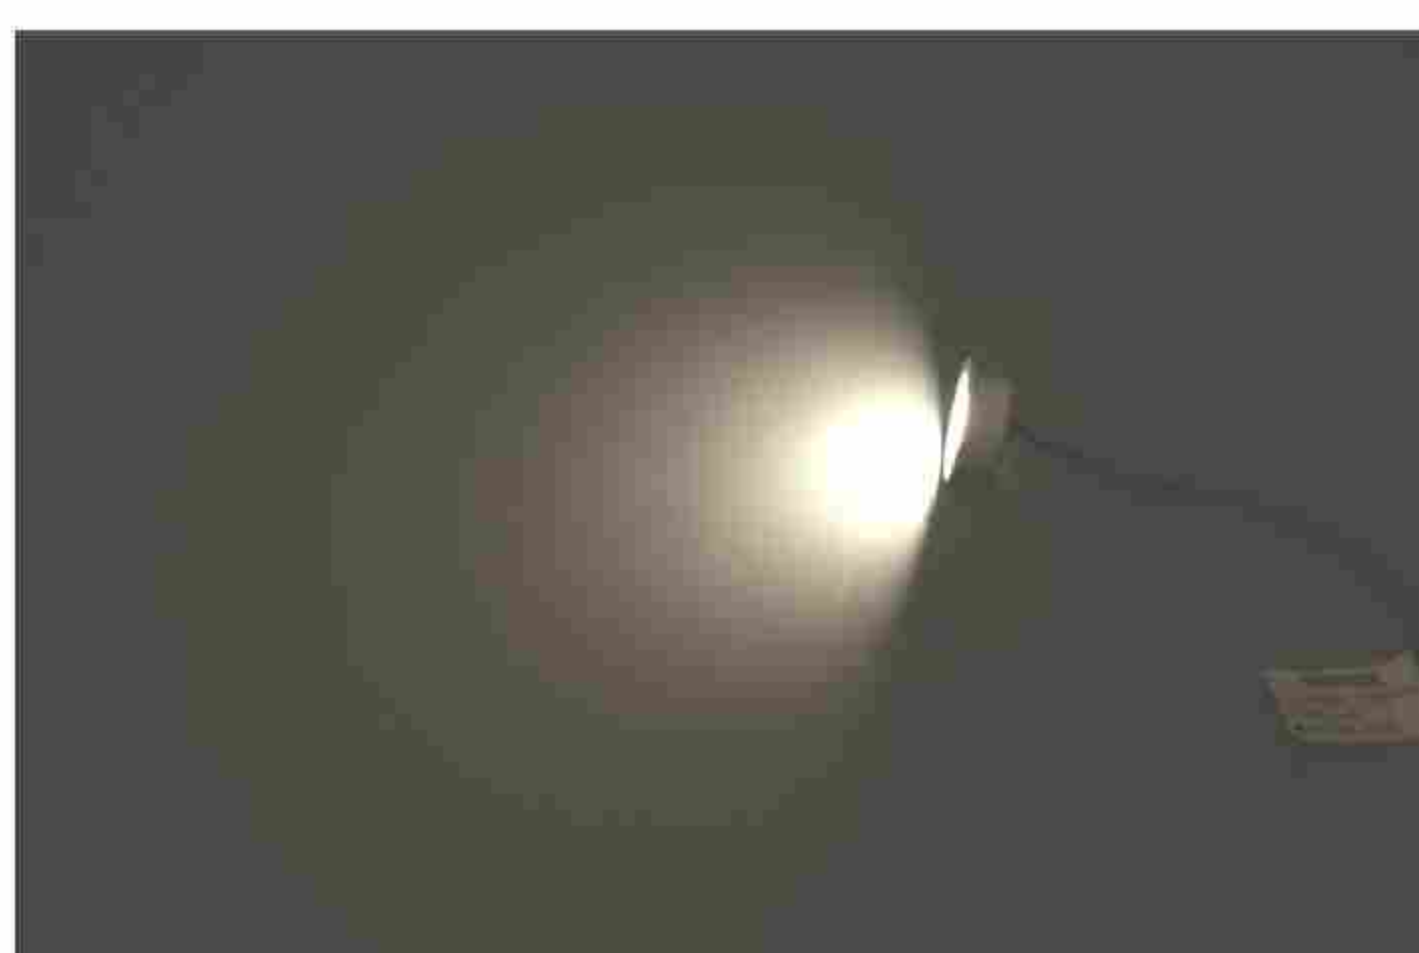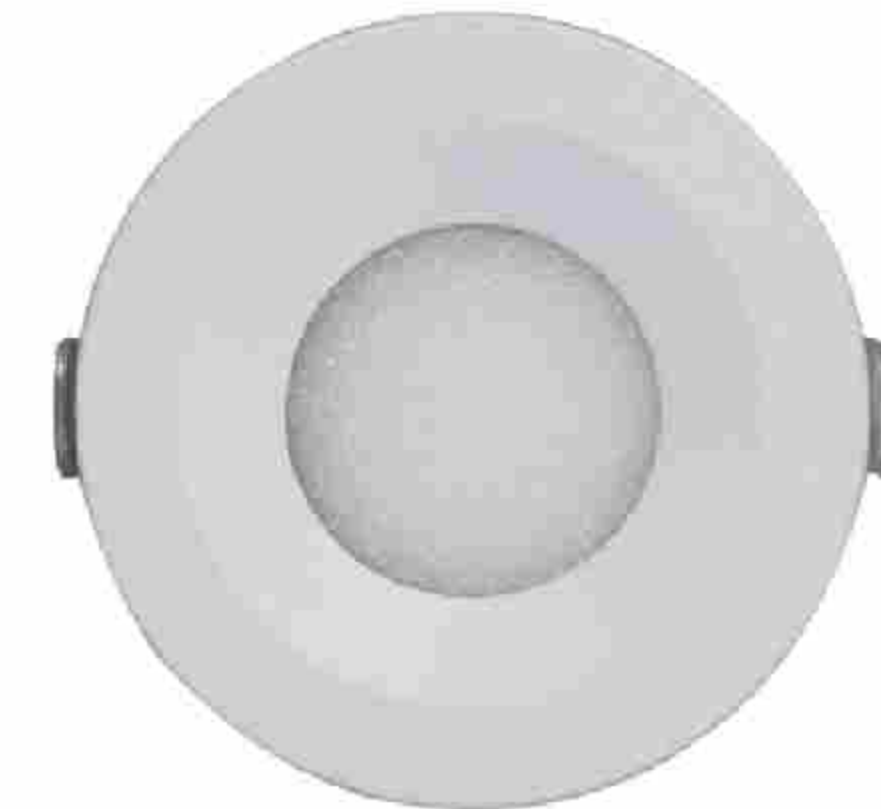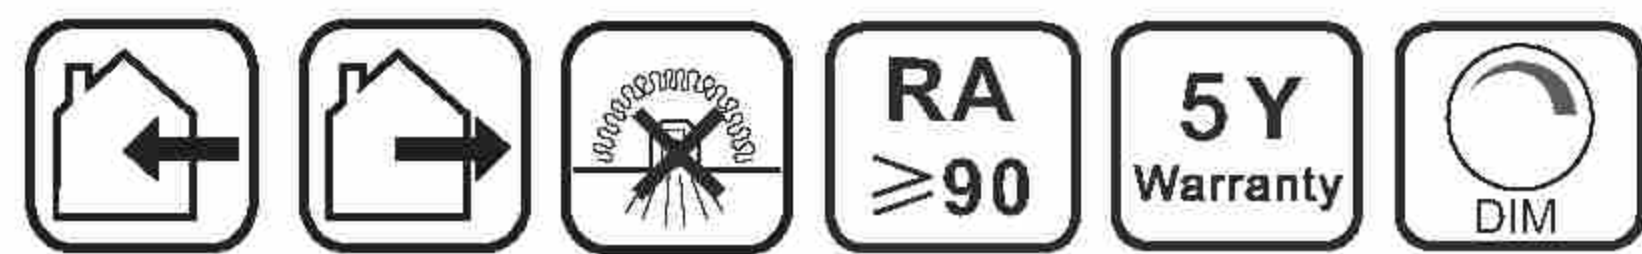

Surface mounting housing





SUPER-MINI indoor spotlight




3


B0110-02/B2

Ultra thin flat

- IP Rating: 54
- Power : 3W
- CRI :90
- Cut-out : Ø28
- Size: Ø34*22mm
- Optics: Lens
- Beam angle : 10/25/30/40/60/80/25*45°
- Material : Aluminum
Stainless-Steel 304/316
- Voltage: 12V/24V 200~240Vac
- Color: Silver, White, Gray, Black, Nickel-brushed, Chrome

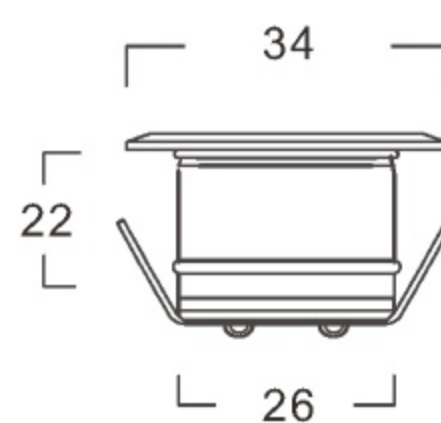


B0110-02/4

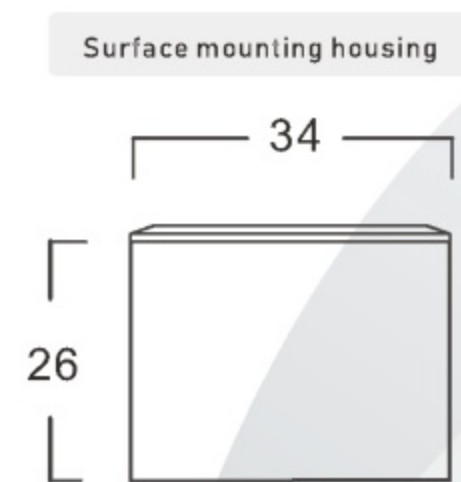

B0202-03-1/A



LED : OSRAM CREE



Triac Dimmable

Connect to 230V directly



SUPER-MINI indoor spotlight

4

Item NO.: B0110-02/B3

Driver Integrated

- IP Rating: 54/67
- Power : 3W
- CRI :90
- Cut-out : Ø28
- Size: Ø35*34mm
- Optics: Lens, Diffuser
- Beam angle : 38/60/120°
- Material : Aluminum
- Stainless-Steel 304/316
- Voltage: 200~240Vac
- Color: Silver, White, Gray, Black, Nickel-brushed, Chrome





IP67



IP54

28mm

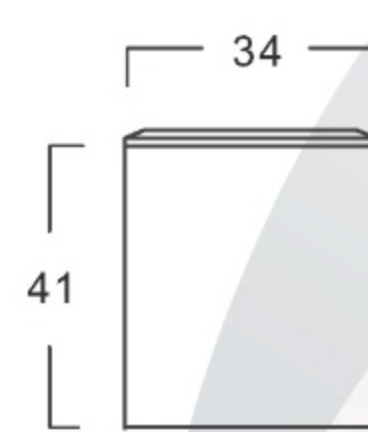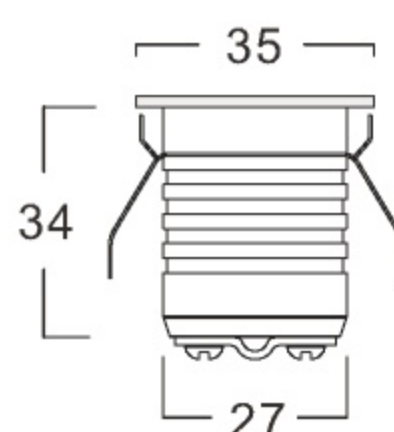

Surface mounting housing



Multiple voltage control schemes

1

One-To-One External constant current Trailing edge Dimmable driver

- Power : 3W
- PF 0.9
- 5 Years warranty



Single CCT Solution



Trailing edge



CCT Solution

2


One-To-Six External constant current Trailing edge Dimmable driver

- Power : 6*3W
- PF 0.9
- 5 Years warranty

ONE-TO-SIX DRIVER



Dimmable

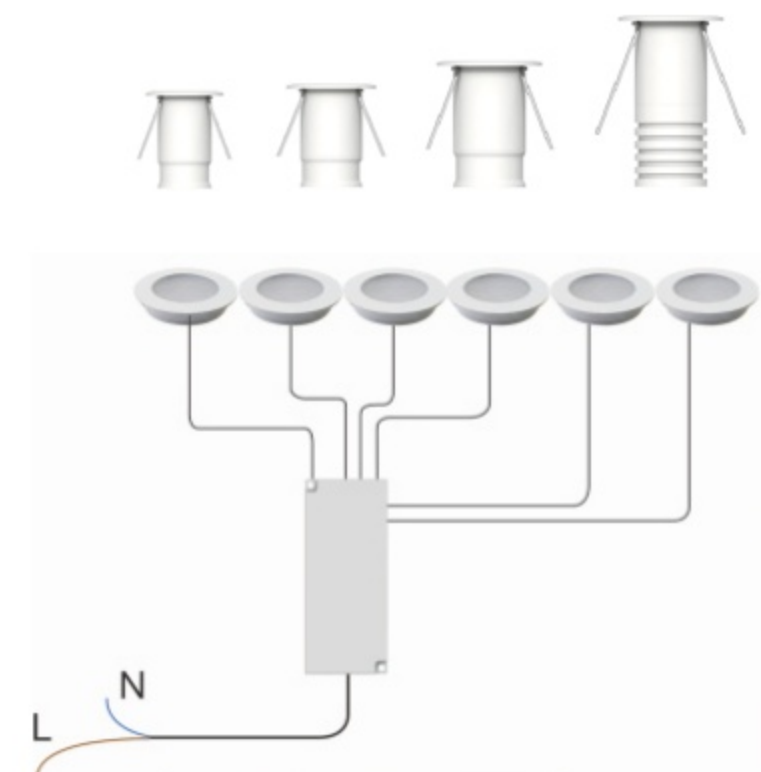

Connect to 110V or 230V

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com

Multiple voltage control schemes

4

DC10-30V wide range voltage solution

- Power : 1W/3W
- 5 Years warranty



Connect to DC10~30V
Connect to battery

5

Connect to 12V or 24V Transformer
Connect to DMX512 Transformer

6

Trailing edge Dimmable driver



Power : 1W/3W
12V DC/24V DC



7

2.4G Smart Control Dimming

- Power : 36*1W/12*3W
- PF : 0.9
- 5 Years warranty
- Remote control
- Brightness Adjust
- Night Light
- 15M,30M,1H Timming Setting
- One driver connect to 36pcs 1W or 12pcs 3W Max. spots



Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com