


- *Specialize in customized LED lights*
- *High CRI LED lights*
- *5year and 10year warranty*
- *IP21/ IP54 / IP65/ IP67 LED lights*
- *Flicker-free & trailing edge driver*
- *Small dimension,but high power and brightness.*

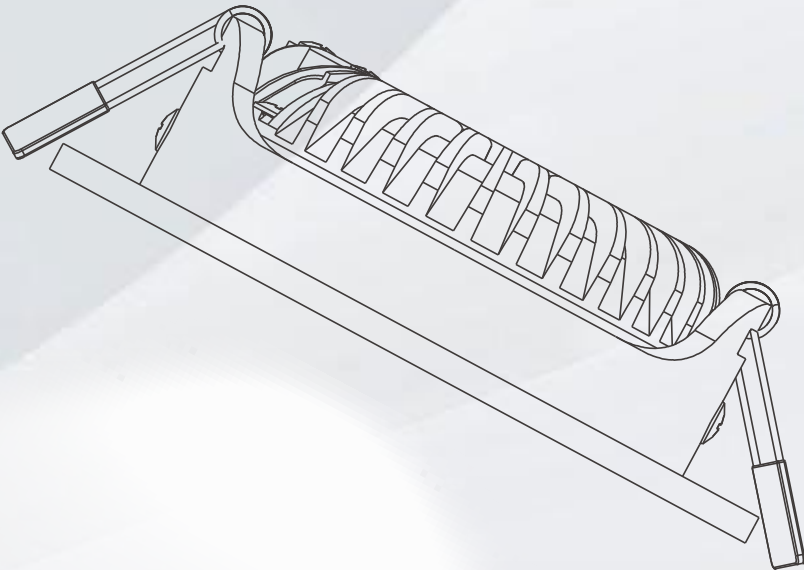

BERDIS LIGHTING CO., LTD
Add: 6F,No.2,DongHou Road,XinHui,
JiangMen City,Guangdong Province,China.
Email: sales2@berdisled.com

DAWNLUX (HONG KONG) PTY LIMITED
Add: Room 20a, kiu Fu Commercial Building,
300 Lockhart Road, Wanchai, Hong Kong.
Email: sales06@berdisled.com

BERDIS LIGHTING (AUSTRALIA) PTY LTD
Add: 19/22 Dunn Crescent, Dandenong,
VIC 3175 Australia.
Phone: (03) 9943 6001
Mobile: 0434 249 723
Email: sales@berdisled.com



PRODUCT CATALOG¹

Professional dimmable LED lights manufacturer



ABOUT US

Over past 10 years, Berdis Lighting has become a pioneer in providing international quality lighting solutions to clients across the world. Using high-end technology and smart innovation techniques, the brand has now established itself as one of the top 3 lighting brands. Berdis led lights are tested and certified by ETL,TUV, SAA, CE, RoHS,IEC,ERP,RED.



We provide 10 years and 5 years warranty for all products. Over the years. Berdis led has gained rich experience and brilliant results in lighting field by providing led lights for home ,offices, industries, education & research institutes, retail spaces, transport infrastructure, road lighting and area lighting.

Berdis thus providing energy-efficient lighting in any environment.



Berdis is professional dimmable led lights producer, had focused on this area for more than 15 years.

We can provide 5 or 10 years warranty based on different customers' inquiry. Dimmable led downlight is our featured products. Europe, North America, Australia and New Zealand are our main markets.

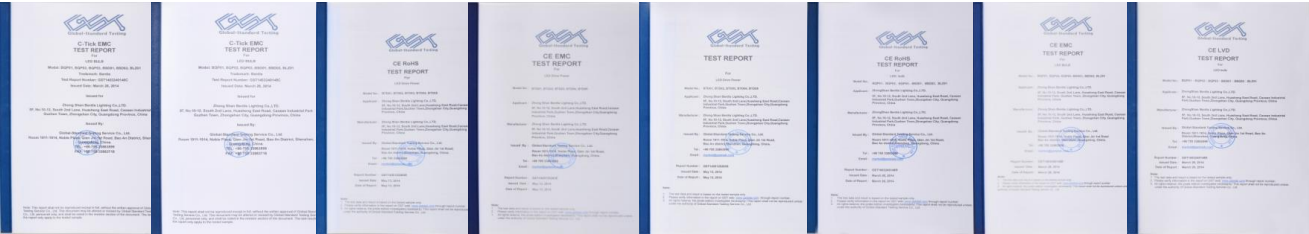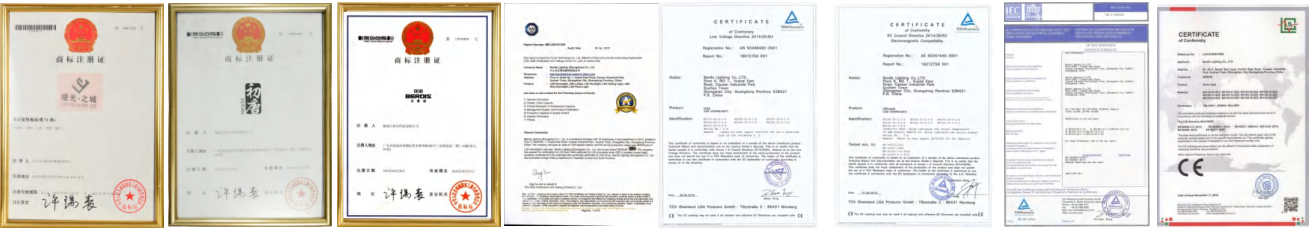




MULTIPLE DTW+CCT SOLUTION

Professional dimming LED light manufacturert


3 N 1 3 CCT + DIM TO WARM
2000K+2700K+DTW (2000K~2800K)

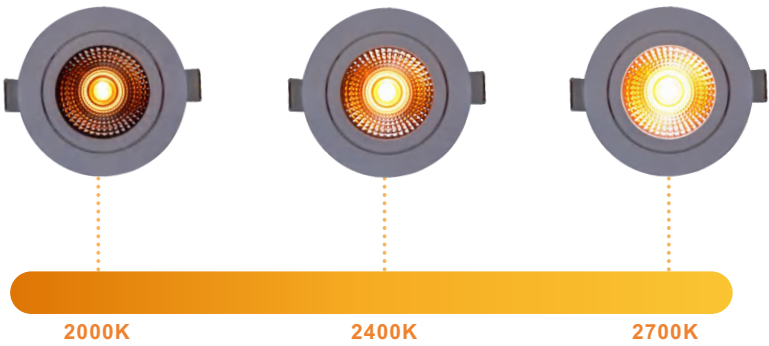

2000K~3000K + 2000K + 2700K

- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,yives you a circadian lighting.


3 N 1 3 CCT + DIM TO WARM
2700K+3000K+DTW (2000K~2800K)

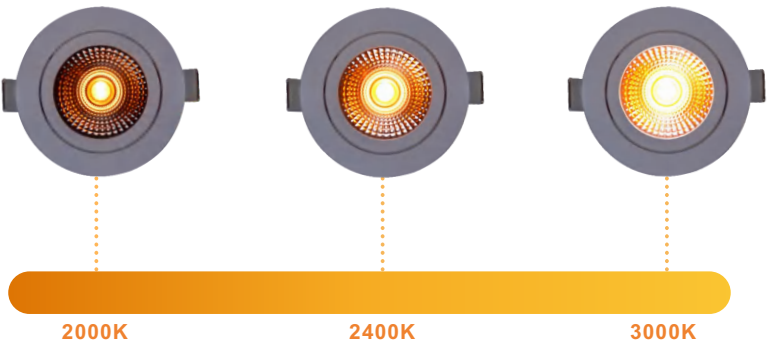

2000K~3000K + 2000K + 3000K

- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,yives you a circadian lighting.


4 N 1 4 CCT + DIM TO WARM
2700K+3000K+4000K+DTW (2000K~4000K)

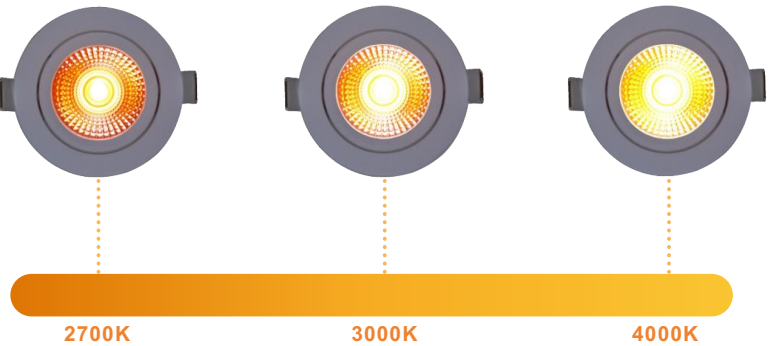

2700K~4000K + 2700K + 3000K + 4000K

- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,yives you a circadian lighting.

DIM TO WARM

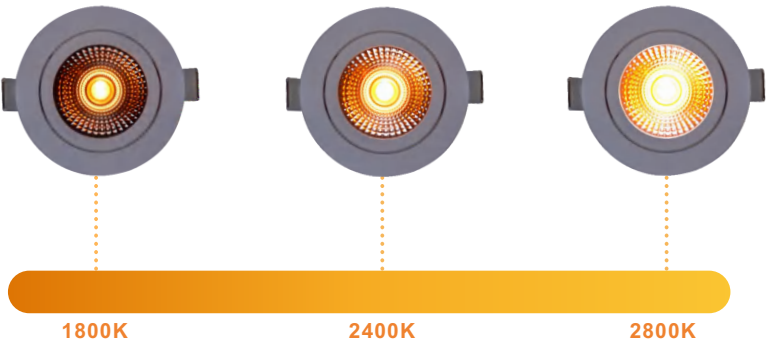

1800K~2800K • 1800K~4000K • 2700K~4000K

- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,yives you a circadian lighting.





ISOLATED POWER

TRIAC DIMMING LED DRIVER

DIMMING AND 5 CCT+2 POWER

DUAL LIGHT SOURCES SWITCHOVER CONTROL

A03-0007(D29)

POWER:5W/8W

CCT:2000K

CCT:2700K/3000K/4000K/5000K/6000K


PF:≥0.95

Flicker free and noise-free

Smooth triac Dimmable

Dimmable Range:10~100%

Dimmable power supply

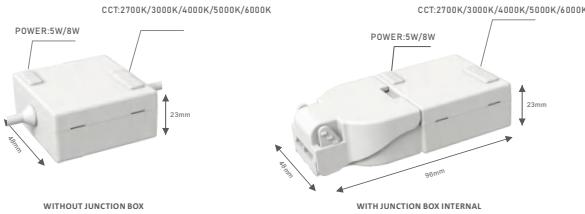

3 CCT SWITCH

Power :3~42W

PF:≥0.90

Flicker free and noise-free

Smooth triac Dimmable

Dimmable Range:10~100%

Dimmable power supply

CCT: 2700K/3000K/4000K

CCT: 2700K/4000K/6000K

CCT: 3000K/4000K/5500K

CRI.: 90

Luminous Efficiency: 130 LM/W MAX.

2 IN 1

2 POWER +3CCT SWITCH

- Power and CCT Switchable
- Multiple power box options
- 5 years and 10 years warranty options

Power :5/7W 8/12W

PF:≥0.95

Flicker free and noise-free

Smooth triac Dimmable

Dimmable Range:10~100%

Dimmable power supply

CCT: 2500K/2700K/3000K

CCT: 2700K/3000K/4000K

CCT: 2700K/4000K/6000K

CCT: 3000K/4000K/5500K

CRI.: 90

Luminous Efficiency: 130 LM/W MAX.

2 POWER SWITCH

Power :5/7W 8/12W

PF:≥0.90

Flicker free and noise-free

Smooth triac Dimmable

Dimmable Range:10~100%

Dimmable power supply



Triac Dimmable



SMART LIGHTING AGE

THE WHOLE HOUSE LIGHTING IS FREELY CONTROLLED

Stepless Dimming

Customize various scenarios



APP smart-light RGCCT spotlight introduction


Control mode:

TUYA APP / Philips HUE APP / Zigbee Remote Control

DESCRIPTION

- CCT :RGB, 2700K~6000K
- Power:5~10W
- IP Rating :54
- 10year warranty

we accept CCT customization



APP smart-light RGCCT spotlight introduction

Control mode:

TUYA APP / Bluetooth Remote Control

DESCRIPTION

- CCT :RGB, 2700K~6000K
- Power:5~10W
- IP Rating :54
- 10year warranty

we accept CCT customization

2.4G SMART CONTROL DIMMING

- Power:36*1W/12*3W
- PF 0.9
- 5 Years warranty
- Remote control
- Brightness Adjust
- Night Light
- 15M,30M,1H Timming Setting
- One driver connect to 36pcs 1W or 12pcs 3W Max. spots



DRIVER INTEGRATED LED SPOTLIGHT

Trailing edge Dimmable driver

- Driver integrated, connect to 230V directly
- Installation height as slim as 23mm
- IP54/ IP65 rating, suitable for bathroom
- Deep dimming, flicker-free;
- 5-year warranty
- Bleow items have driver internal option :
- Flicker-free & trailing edge driver



WATER-PROOF DIMMABLE SOLUTION

Trailing edge Dimmable driver


- Trailing edge
- 5year and 10year warranty
- IP21/ IP54 / IP65/ IP67
 - IP54 suitable for bathroom
 - IP65 suitable for Patio,Porch,Eave,Shower room
 - IP67 can be briefly immersed in water
- Flicker-free & trailing edge driver



One-To-Six External constant current

Trailing edge Dimmable driver

- Power : 6*3W
- PF 0.9
- 5 Years warranty

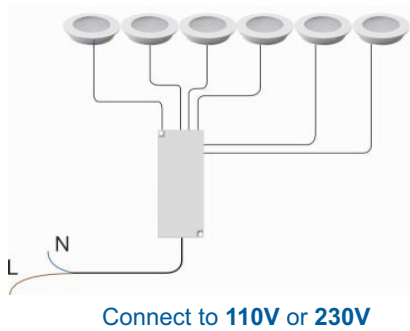


ONE-TO-SIX DRIVER



Constant voltage solution

Trailing edge Dimmable driver

- Power:18W
- Input:230Vac
- ouput:12Vdc and 24Vdc
- PF 0.9
- 5 Years warranty

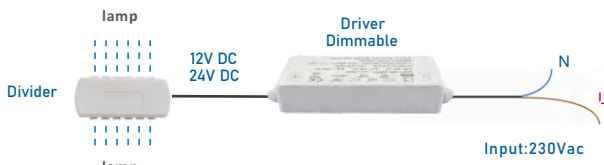



FRAME REPLACEABLE

3 OPTIONS: REFLECTOR/LENS/DIFFUSER



- 135W/LM MAX.
- Smooth dimming
- Flick-free and noise-free
- 5 years and 10 years warranty options

- * Ra >90, colors are displayed perfectly and vividly.
- * Driver is small, it fits through the hole in the ceiling.
- * Perfectly dimmable and with a lifespan of at least 50,000 hours.
- * It's a real powerhouse: perfectly dimmable and a lifespan of at least 50,000 hours!
- * We provide 5CCT and 3CCT version option.
- * The spotlight are available in fixed and tiltable versions.
- * with a tough matt-white and matt-black finish and IP54 and IP67 rated.
- * It is also possible to apply a DALI, 1-10V, 9~36V DC or ZIGBEE driver to these spots..







ULTRA-THIN SPOTLIGHT
INSTALLATION HEIGHT 24MM.
IP 65 WATERPROOF AND FIREPROOF
FREELY MATCH WITH DIFFERENT COLOR/TYPE FRAMES




- B0103-04/B1 (Adjustable Spotlight)
- B0103-04/B2 (NO-Adjustable Spotlight)
- B0103-04/B3 (Downlight)



Power: 5W/7W
Luminous Efficiency: 110 LM/W
CRI: 90
Beam angle: 24°/38°/60°/120°
Voltage: 220V/110V
IP Rating: 21/54/65

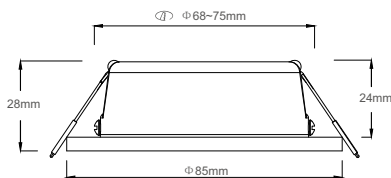

- * Can be used under insulation directly.
- * Fireproof downlights can resist from as high as 1100° temperatures without melting.
- * Effectively isolating the spread of flames and preventing the expansion of fires.
- * IP67 lamps can resist from the impact of strong rainstorms, and can even be submerged in water for a short duration, adapt to a variety of harsh installation environments.




ULTRA-THIN WATERPROOF SPOTLIGHT
INSTALLATION HEIGHT 15MM.
FREELY MATCH WITH DIFFERENT COLOR/TYPE FRAMES



B0103-04/A1(Adjustable Spotlight)

B0103-04/A2(N0-Adjustable Spotlight)



Power: 5W/7W

Luminous Efficiency: 110 LM/W

CRI.: 90


Beam angle: 24°/38°/60°/90°

Voltage: 220V/110V



IP Rating: 21/54/65



INSTALLATION HEIGHT 15MM

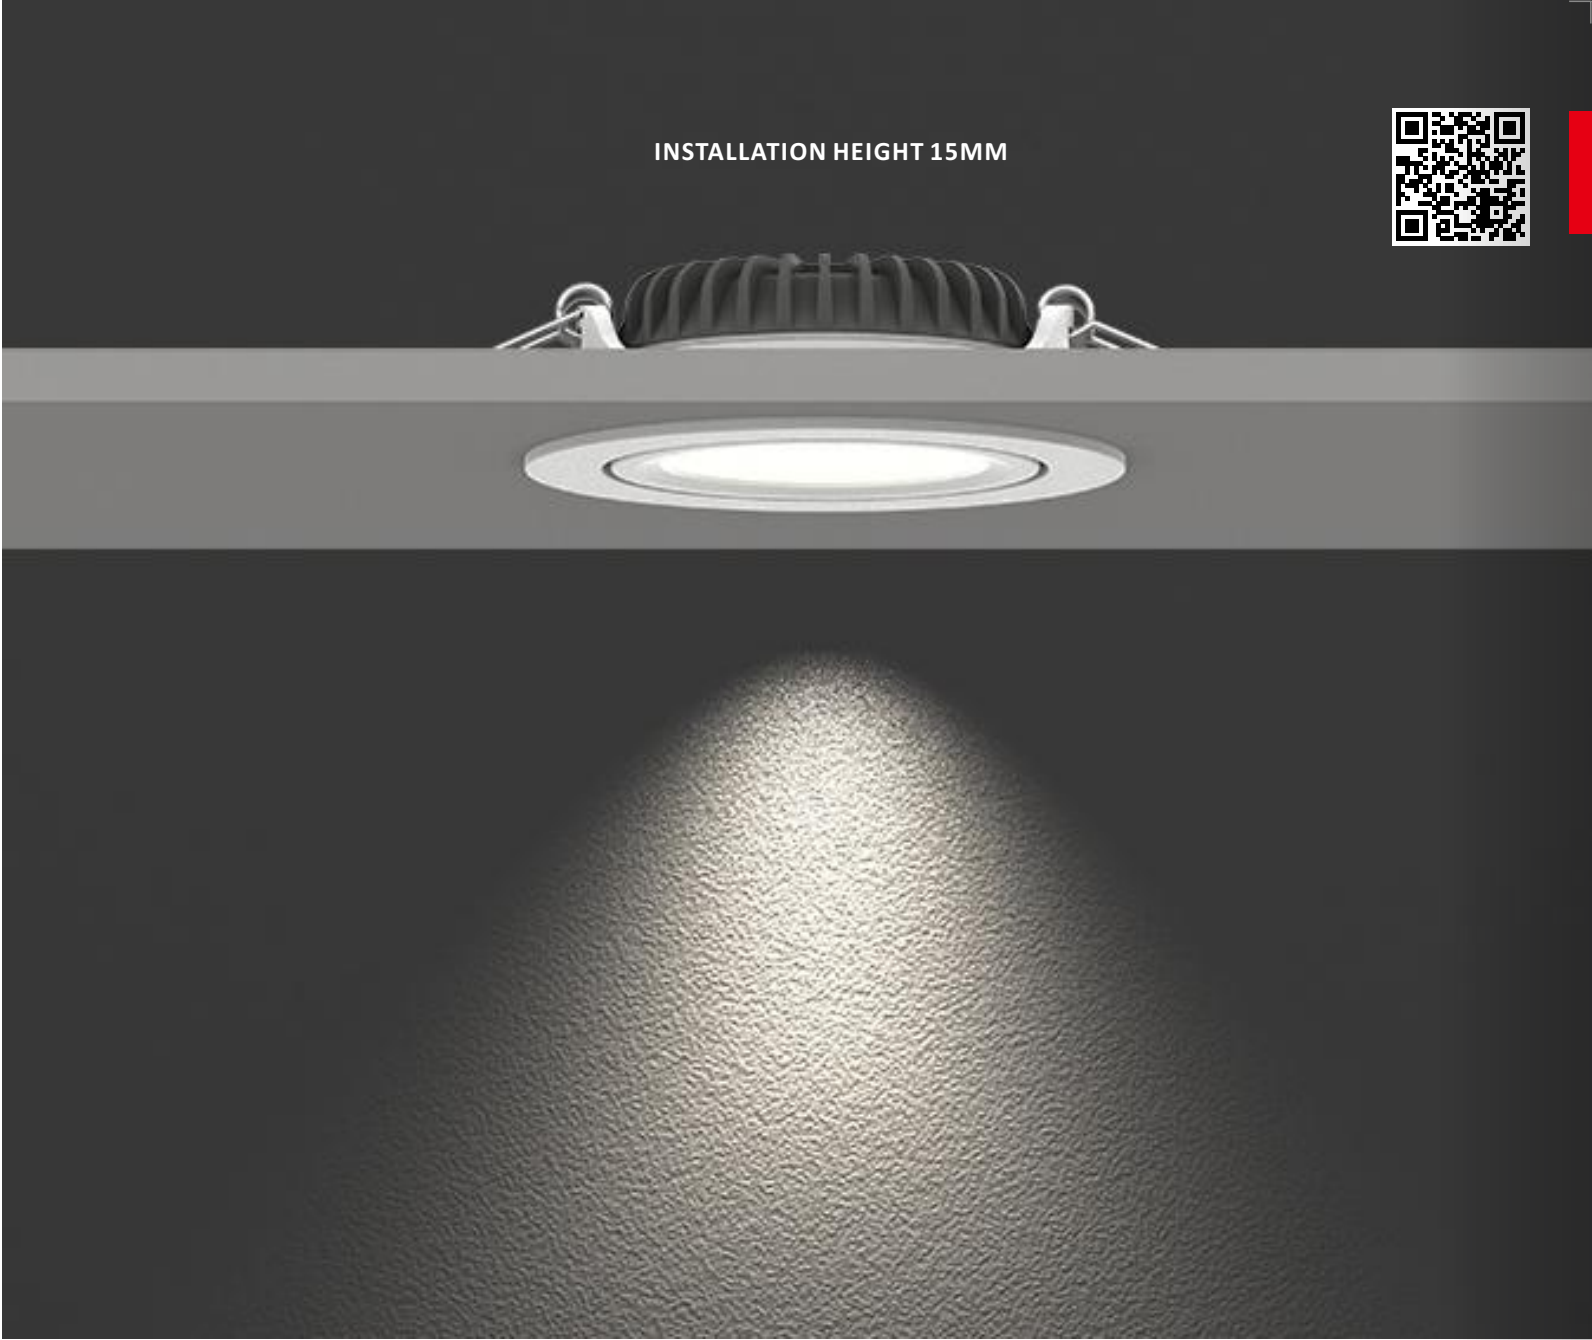

- * Ultra thin flat version.
- * Installation height 15mm.
- * Multiple beam angle options.
- * IP20, IP54, IP65 waterproof.
- * Deep dimming, flicker-free

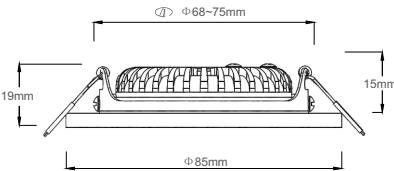


ULTRA SLIM FLAT ADJUSTABLE




ADJUSTABLE ANGLE

Tell the story of lighting with quality

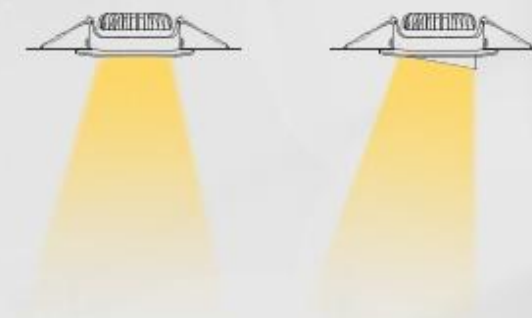




ULTRA SLIM FLAT ADJUSTABLE




B0101-07/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
3W	2700/3000/4000K	270lm	90	21/54	24/60°
5W	2700/3000/4000K	450lm	90	21/54	24/60°
5W	1800-2800K	300lm	95	21/54	24/60°




B0101-03/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65	24/38/60°
5W	1800-2800K	300lm	95	21/54/65	24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/65	24/38/60°
7W	1800-2800K	380lm	95	21/54/65	24/38/60°




B0101-03/A2



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
2*5W	2700/3000/4000K	1200lm	90	21/54/65	60°
2*5W	1800-2800K	800lm	95	21/54/65	60°
2*7W	2700/3000/4000K	1800lm	90	21/54/65	60°
2*7W	1800-2800K	1000lm	95	21/54/65	60°




B0101-01/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65/67	24/38/50/60°
5W	1800-2800K	300lm	95	21/54/65/67	24/38/50/60°
7W	2700/3000/4000K	600lm	90	21/54/65/67	24/38/50/60°
7W	1800-2800K	380lm	95	21/54/65/67	24/38/50/60°
9W	2700/3000/4000K	800lm	90	21/54/65/67	24/38/50/60°




B0101-05/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65/67	24/38/50/60°
5W	1800-2800K	350lm	95	21/54/65/67	24/38/50/60°
7W	2700/3000/4000K	630lm	90	21/54/65/67	24/38/50/60°
7W	1800-2800K	400lm	95	21/54/65/67	24/38/50/60°
9W	2700/3000/4000K	800lm	90	21/54/65/67	24/38/50/60°



B0101-08/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
8W	2700/3000/4000K	700lm	90	21/54/65/67	60°
8W	1800-2800K	400lm	95	21/54/65/67	60°
10W	2700/3000/4000K	900lm	90	21/54/65/67	60°
10W	1800-2800K	500lm	95	21/54/65/67	60°
12W	2700/3000/4000K	1000lm	90	21/54/65/67	60°
12W	1800-2800K	550lm	95	21/54/65/67	60°




FRAME REPLACEABLE


IP67 waterproof 3~50W Spotlight




B0101-09/A1




Power	CCT	Lumen	CRI	IP Rating	Beam Angle
12W	2700/3000/4000K	1000lm	90	21/54/65/67	60°
12W	1800-2800K	680lm	95	21/54/65/67	60°
15W	2700/3000/4000K	1270lm	90	21/54/65/67	60°



B0101-10/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
18W	2700/3000/4000K	1530lm	90	21/54/65/67	60°
20W	2700/3000/4000K	1800lm	95	21/54/65/67	60°
24W	2700/3000/4000K	2040lm	90	21/54/65/67	60°



SUPER SLIM LED CEILING LIGHT

- 5year and 10year warranty
- IP21/ IP54 / IP65/ IP67
 - IP54 suitable for bathroom
 - IP65 suitable for Patio,Porch,Eave,Shower room
 - IP67 can be briefly immersed in water
- Flicker-free & trailing edge driver
- Adjustable and non-adjustable options
- Cut-out options: 55/68/75/83/90/115/165mm
- Small dimension,but high power and brightness.
- Light efficiency is 120lm/W Max.





APP smart-light RGB CCT spotlight introduction



Control mode:
TUYA APP / Philips HUE APP / Zigbee Remote Control

DESCRIPTION

- CCT:RGB, 2700K~6000K
- Power:5~10W
- IP Rating :54
- 10year warranty

we accept CCT customization


SMART LIGHTING AGE
THE WHOLE HOUSE LIGHTING IS FREELY CONTROLLED

- Stepless Dimming
- Multiple control methods: mobile phone, control desk, remote control
- Customize various scenarios



- Long range control
- APP and remote contro
- Any monochrome choice
- Automatic color change with music
- Brightness and darkness adjustment
- Multiple mode one-click selection
- Colorful, monochrome random transformation
- 16 million color refresh our mind for home and lights.
- Color changing automatically or manually.
- Brightness and CCT are adjustable separately within lights controlled by a power supply set.

SLIM ANTI-GLARE SPOTLIGHT REFLECTOR AND LENS

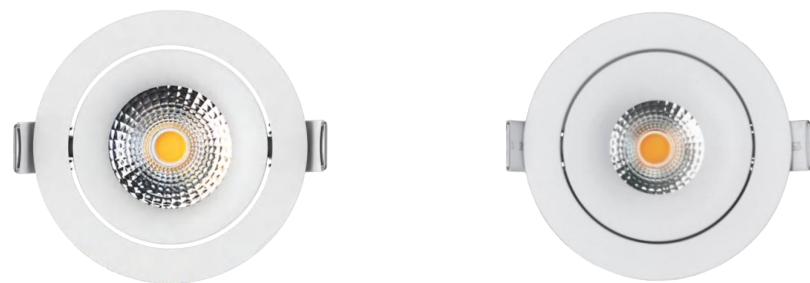


PRODUCT DISPLAY

Tell the story of lighting with quality






SLIM ANTI-GLARE SPOTLIGHT
REFLECTOR AND LENS




B0101-07/C1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°




B0101-05/C1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
7W	1800-2800K	380lm	95	21/54/67	15/24/38/60°




B0101-01/C2



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
7W	1800-2800K	380lm	95	21/54/67	15/24/38/60°



B0101-08/C1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
8W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
8W	1800-2800K	400lm	95	21/54/67	15/24/38/60°
10W	2700/3000/4000K	900lm	90	21/54/67	15/24/38/60°
10W	1800-2800K	500lm	95	21/54/67	15/24/38/60°
12W	2700/3000/4000K	1100lm	90	21/54/67	15/24/38/60°
12W	1800-2800K	550lm	95	21/54/67	15/24/38/60°





2IN1

2 POWER + 3CCT SWITCH

- CCT: 2700K/3000K/4000K
- CCT: 2700K/4000K/6000K
- CCT: 2500K/2700K/3000K
- CCT: 3000K/4000K/5500K

- Power and CCT Switchable
- Multiple power box options
- 5 years and 10 years warranty options




- Power :3~42W
- PF:≥0.95
- Flicker free and noise-free
- Smooth triac Dimmable
- Dimmable Range:10~100%
- Dimmable power supply




Triac Dimmable

ULTRA SLIM BEVEL ADJUSTABLE

REFLECTOR AND LENS

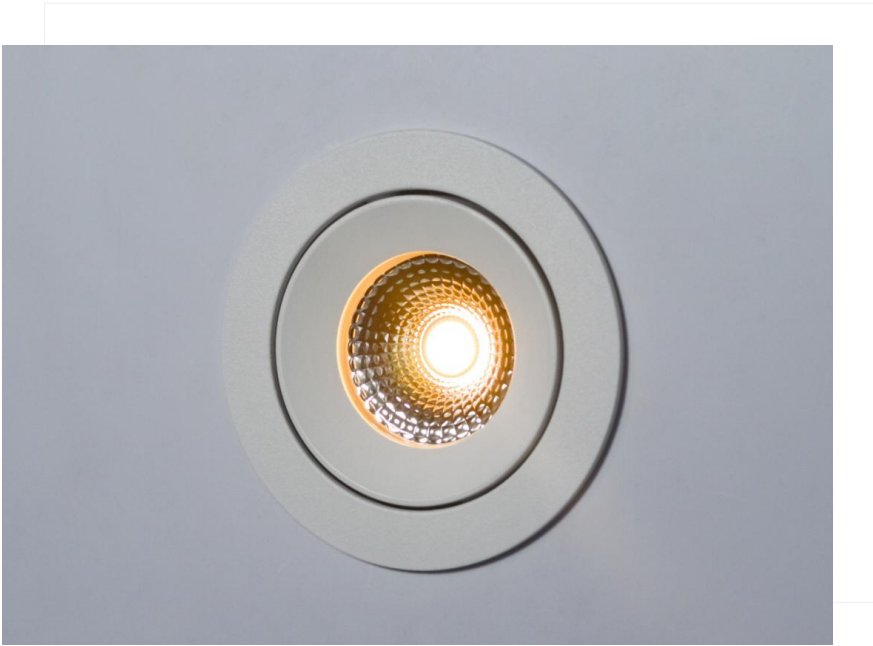


ULTRA SLIM BEVEL ADJUSTABLE




B0101-07/C1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°




B0101-01/C2

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
7W	1800-2800K	380lm	95	21/54/67	15/24/38/60°




B0101-05/C1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/67	15/24/38/60°
5W	1800-2800K	300lm	95	21/54/67	15/24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
7W	1800-2800K	380lm	95	21/54/67	15/24/38/60°




B0101-08/B1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
8W	2700/3000/4000K	600lm	90	21/54/67	15/24/38/60°
8W	1800-2800K	400lm	95	21/54/67	15/24/38/60°
10W	2700/3000/4000K	900lm	90	21/54/67	15/24/38/60°
10W	1800-2800K	500lm	95	21/54/67	15/24/38/60°
12W	2700/3000/4000K	1100lm	90	21/54/67	15/24/38/60°
12W	1800-2800K	550lm	95	21/54/67	15/24/38/60°




B0101-09/B1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
12W	2700/3000/4000K	1100lm	90	21/54/67	60°
12W	1800-2800K	680lm	95	21/54/67	60°
15W	2700/3000/4000K	1350lm	90	21/54/67	60°
18W	2700/3000/4000K	1620lm	90	21/54/67	60°



B0101-10/B1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
18W	2700/3000/4000K	1620lm	90	21/54/67	60°
20W	2700/3000/4000K	1800lm	95	21/54/67	60°
24W	2700/3000/4000K	2400lm	90	21/54/67	60°
28W	2700/3000/4000K	2800lm	90	21/54/67	60°





- Flicker-free & trailing edge driver
- 2.4G Voltage Dimmable, 0-10V, DALI, Zigbee
- Driverless Trailing edge Dimmable solution
- Internal DC12V/24V single voltage solution
- Internal DC9-36V wide range voltage solution
- One-To-One External constant current Trailing edge Dimmable driver
- One-To-Six External constant current Trailing edge Dimmable driver

Ra ≥ 90, TRUE COLORS

High color rendering chip, highly reproduces object colors, provides eye protection and comfort.



DIM TO WARM

1800K~2800K • 1800K~4000K • 2700K~4000K



ISOLATED POWER

TRIAC DIMMING LED DRIVER

DIMMING AND 5 CCT+2 POWER

DUAL LIGHT SOURCES SWITCHOVER CONTROL

A03-0007(D29)

POWER:5W/7W

CCT:2000K

CCT:2700K/3000K/4000K/5000K/6000K

FEATURES

- 10 years warranty options
- Input voltage range 200~240 V AC (180~264 V AC)
- Typical efficiency of 82 %
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -25...+55 °C
- Insulated plastic case, IP20/IP65
- Protection: open circuit / short circuit / overload




TEMPERATURE RISE TEST

Total test duration: 8 hours

Constant temperature duration: 1 hour

At ambient temperatures of:29.2 °C

lowest value: 50°centre value: 62°Highest value: 78°

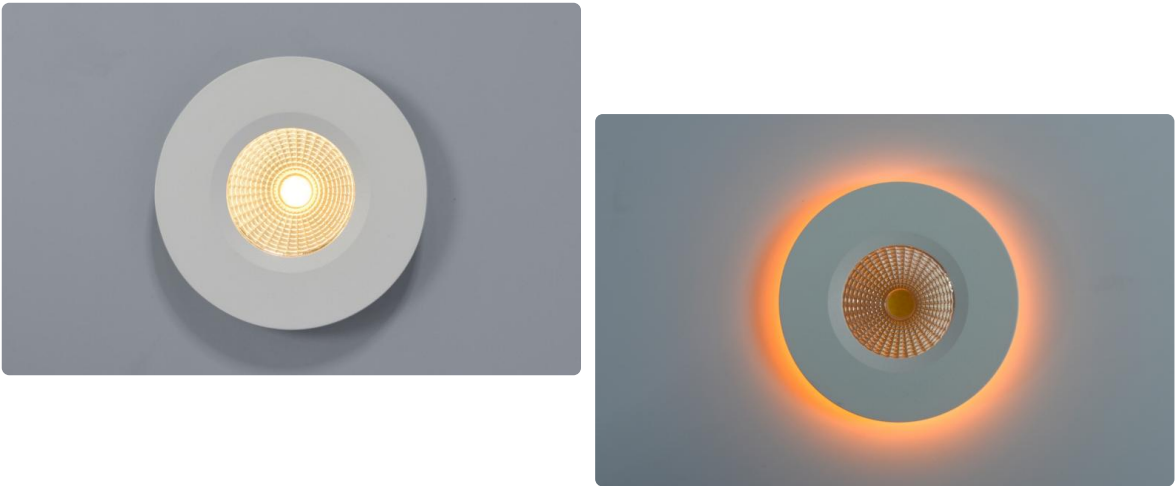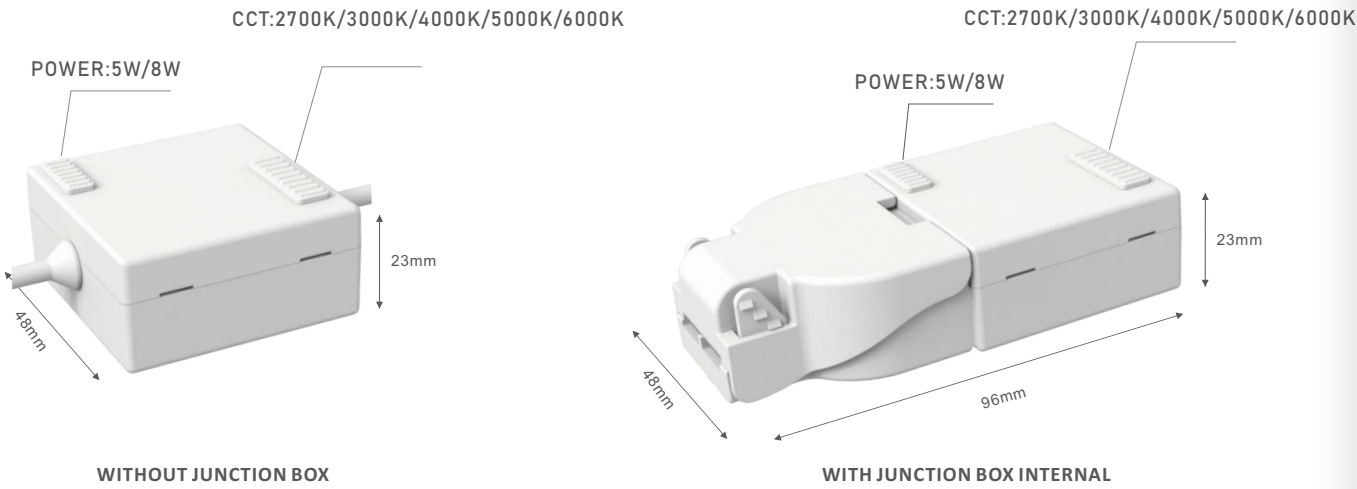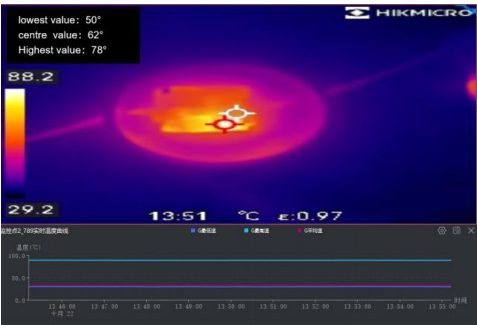




ULTRA DEEP ANTI-GLARE SPOTLIGHT



Product Display

Item NO.:B0101-01/Z3
Power: 5W/7W
Luminous Efficiency: 70lm/w
CRI.:90
Beam angle: 15/24/38/60°
Voltage: 220V/110V
IP Rating: 21/54
Material: Aluminum






MOTION SENSOR SLIM DOWNLIGHT

B0101-01/Z1 (CUT OUT: Ø68~75mm,Ø83~90mm)

- Power: 5W/7W/10W/12W
- Luminous Efficiency: 110 LM/W
- CRI.: 90
- Beam angle: 60°
- Voltage: 220V/110V
- IP Rating: 21/54
- Material: Aluminum
- 5 years warranty options

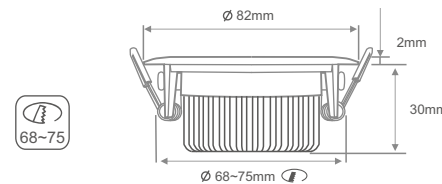

SETTING 1:

- The motion sensor works both during day time and night times. it turns on when detecting human movement.
- The fitting won't turn on under strong sunlight during day time. while very bright during night time.
- The fitting won't turn on under strong sunlight during day time. It works during night time when detecting human movement. The fitting won't turn on under strong sunlight during day time.

SETTING 2:

- It works during night time under 1 watt power when detecting human movement.
- Settings in power including 3 watt,6watt.
- Settings in switching temp colour including 2700k,3000k,4000k and 6000k.

EMERGENCY LIGHTING


B0101-01/Z2 (CUT OUT: Ø68~75mm,Ø83~90mm)

- Lamps Power: 5W/7W/10W/12W
- Input:AC100-265V/50-60HZ
- Luminous Efficiency: 80 LM/W
- CRI.: 90
- Beam angle: 60°
- IP Rating: 21/54
- Material: Aluminum
- Warranty: 5 years
- Humidity range: 65%±20%
- Temperature range : -10° ~50°




EMERGENCY LIGHTING PARAMETERS

- Emergency 3W 3H
- Emergency time : ≥180min
- Battery packs: 3.7V 2500mAh
- Conversion efficiency : ≥ 80%
- Charging Time : ≥24hours
- Emergency switch time : ≤1S
- Lighting system : continuous

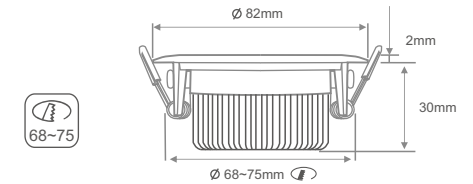

DESCRIPTION

- This product should be installed by trained electricians. Forbid connecting wires when power is on, make power on after make sure that there is no phenomenon of short circuit and the correction is ok.
- Main power line: Live wire TL and null line N, connect to main power line directly. no switch can be allowed when emergency lighting. the law forbids the switch control emergency circuit.
- The wall switch only controls the main power, no function on emergency lighting. The Switch live wire SL and charging live wire TL should be in the same phase.
- Green light-main power .Red light-charging. Yellow light-mulfunction.Test: test button.
- Emergency lighting condition,three-color light is all out.
- Digital circuits, self-test function (monthly inspection, annual inspection), fault or automatic alarm function cause by illegal operation. You should connect the led lamp and charge the emergency pack before use. In order to avoid emergency lightingfunction failure.
- Frequently test is prohibited . Each test interval is not less than one minute. 10 .Emergency movement is the core device which controls the battery charge or discharge and start the lighting when under emergency must ensure the wiring is correct. After under normal use, need to discharge once every three months for battery conservation and extend the battery life. Emergency lighting power installed and put into use, need to regularly check, maintain, examine and repair when discover the abnormal condition, or inform the supplier to deal with.



B0107-03/A1 (PC+Aluminum)


B0101-02/B (Aluminum)





Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65	24/38/60°
5W	1800-2800K	300lm	95	21/54/65	24/38/60°
7W	2700/3000/4000K	600lm	90	21/54/65	24/38/60°
7W	1800-2800K	380lm	95	21/54/65	24/38/60°
9W	2700/3000/4000K	600lm	90	21/54/65	24/38/60°



DIM TO WARM

1800K~2800K • 1800K~4000K • 2700K~4000K





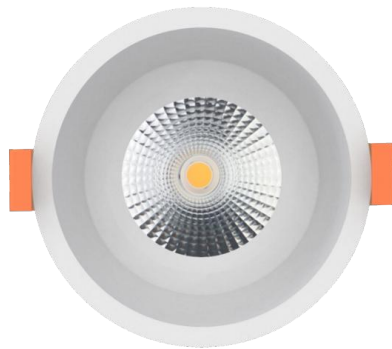

DEEP ANTI-GLARE
NON-ADJUSTABLE

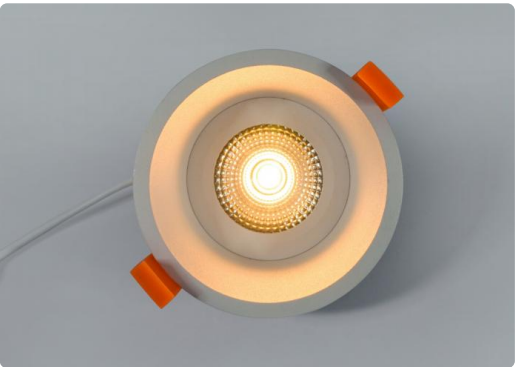


Item NO.:B0101-02/C
Power: 5W/7W/10W/15W/20W
Luminous Efficiency: 90lm/w
CRI:90
Beam angle: 24/38/60°
IP Rating: 21/54/65/67
Material: Aluminum

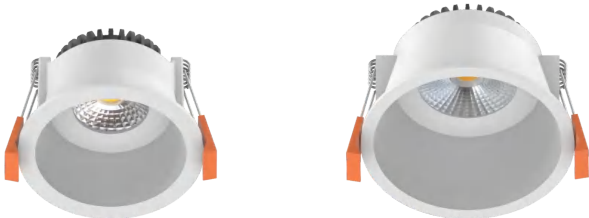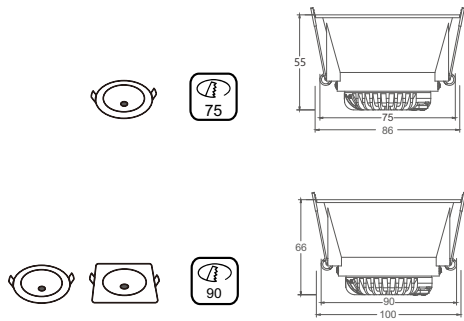



SOFT LAMPSHADE

Big light surface, high light efficiency soft & even light,
Eye-protection high ra>90, recover the original color.

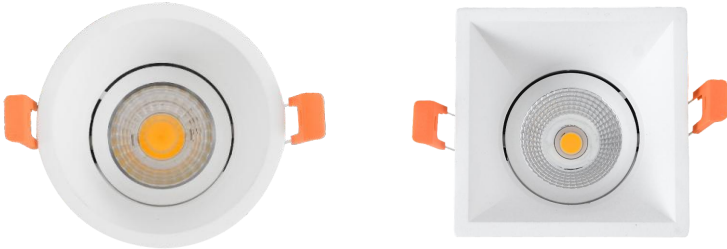

- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,gives you a circadian lighting.

1800K~2800K • 1800K~4000K • 2700K~4000K



Triac Dimmable

DEEP ANTI-GLARE ADJUSTABLE



Item NO.:B0101-02/A

Power: 5W/7W/10W/15W/20W

Luminous Efficiency: 80lm/w




CRI:90

Beam angle: 24/38/50/60°

Voltage: 220V/110V

IP Rating: 21/54/65/67

Material: Aluminum

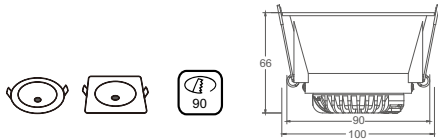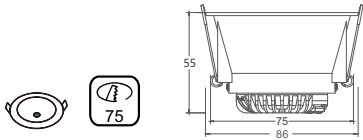






STRETCHABLE ANTI-GLARE LED DOWNLIGHT

B0103-03/A

Power	Lumen	CRI	IP Rating	Beam Angle
5W/7W/9W	450lm	90	21/54/65/67	24/38/50/60°



ANTI-GLARE
LED SPOTLIGHT
STRETCHABLE & ADJUSTABLE

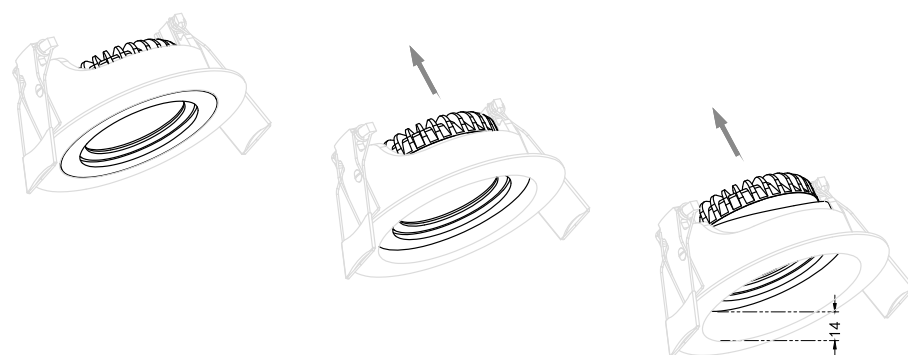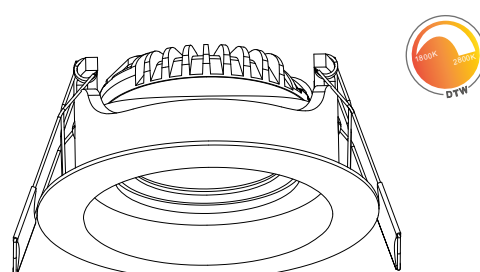

- Deep chips inside lead to better protection of eyes
- Highly used in commercial places





Pushable heat sink lead to anti-glare and non-anti-glare option
Max. push depth: 12mm





- Dim to warm LED simulates the color tones of halogens
- It likes sunset to sunrise,gives you a circadian lighting.

1800K~2800K • 1800K~4000K • 2700K~4000K



Triac Dimmable

DIMMABLE TYPE

TRIAC DIMMABLE

Power change from 10%-100% when you turn dimmer from left to right.

DALI DIMMABLE

When light connected to DALI control system,Power change from 10%-100% when you turn dimmer from left to right.

ON/OFF CCT CHANGE DIMMING

When you turn on for the first time,CCT is 3000K,and can be dimmable from 10%-100% at the same time:
Then turn off and turn on for second time followed,CCT is 4000K,and can be dimmable from 10%-100% at the same time;
Turn off again and turn on for the third time, CCT is 5500K,and can be dimmable from 10%-100% at the same time;
When you keep turn off and turn on,CCT is back to 3000K,then 4000K,5500K...and so on,each CCT can be dimmable from 10%-100% at the same time.

0-10V DIMMABLE

When light connected to 12/24V voltage, Power change from 10%-100% when you turn dimmer from left to right at the voltage range 0-10V.

ON/OFF DIMMING

10% - 25% - 50% - 100%

when you turn on for the first time,power is 100%:
Then turn off and turn on for second time followed,power change is 30% & 50%;
Turn off again and turn on for the third time, power is 10%;
When you keep turn off and turn on,power is back to 100%,then 50%,10%...and so on.

DIM TO WARM

2000-3000K


Power change from 10%-100% when you turn dimmer from left to right,and CCT change from 2000K to 3000K at the same time.

DIMMING AND 5 CCT+2 POWER

2700-4000K


Dual light sources switchover control
Power:5W/8W and 8W/12W CCT:2000K CCT:2700K/3000K/4000K/5000K/6000K
Power change from 10%-100% when you turn dimmer from left to right

IP65/IP67 NON-TILTABLE LED SPOTLIGHT

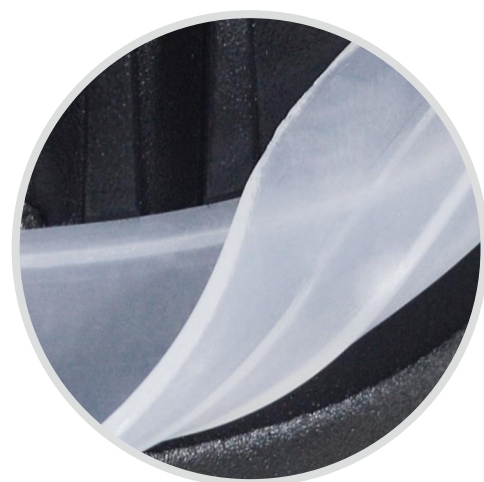

SUPERB SLIM LED CEILING LIGHT

- IP21/ IP54 / IP65/ IP67
- IP54 suitable for bathroom
- IP65 suitable for Patio,Porch,Eave,Shower room
- IP67 can be briefly immersed in water
- Adjustable and non-adjustable options
- Cut-out options: 55/68/75/83/90/115/165mm
- 5year an 10year warranty
- Small dimension,but high power and brightness.
Light efficiency is 120lm/W Max.

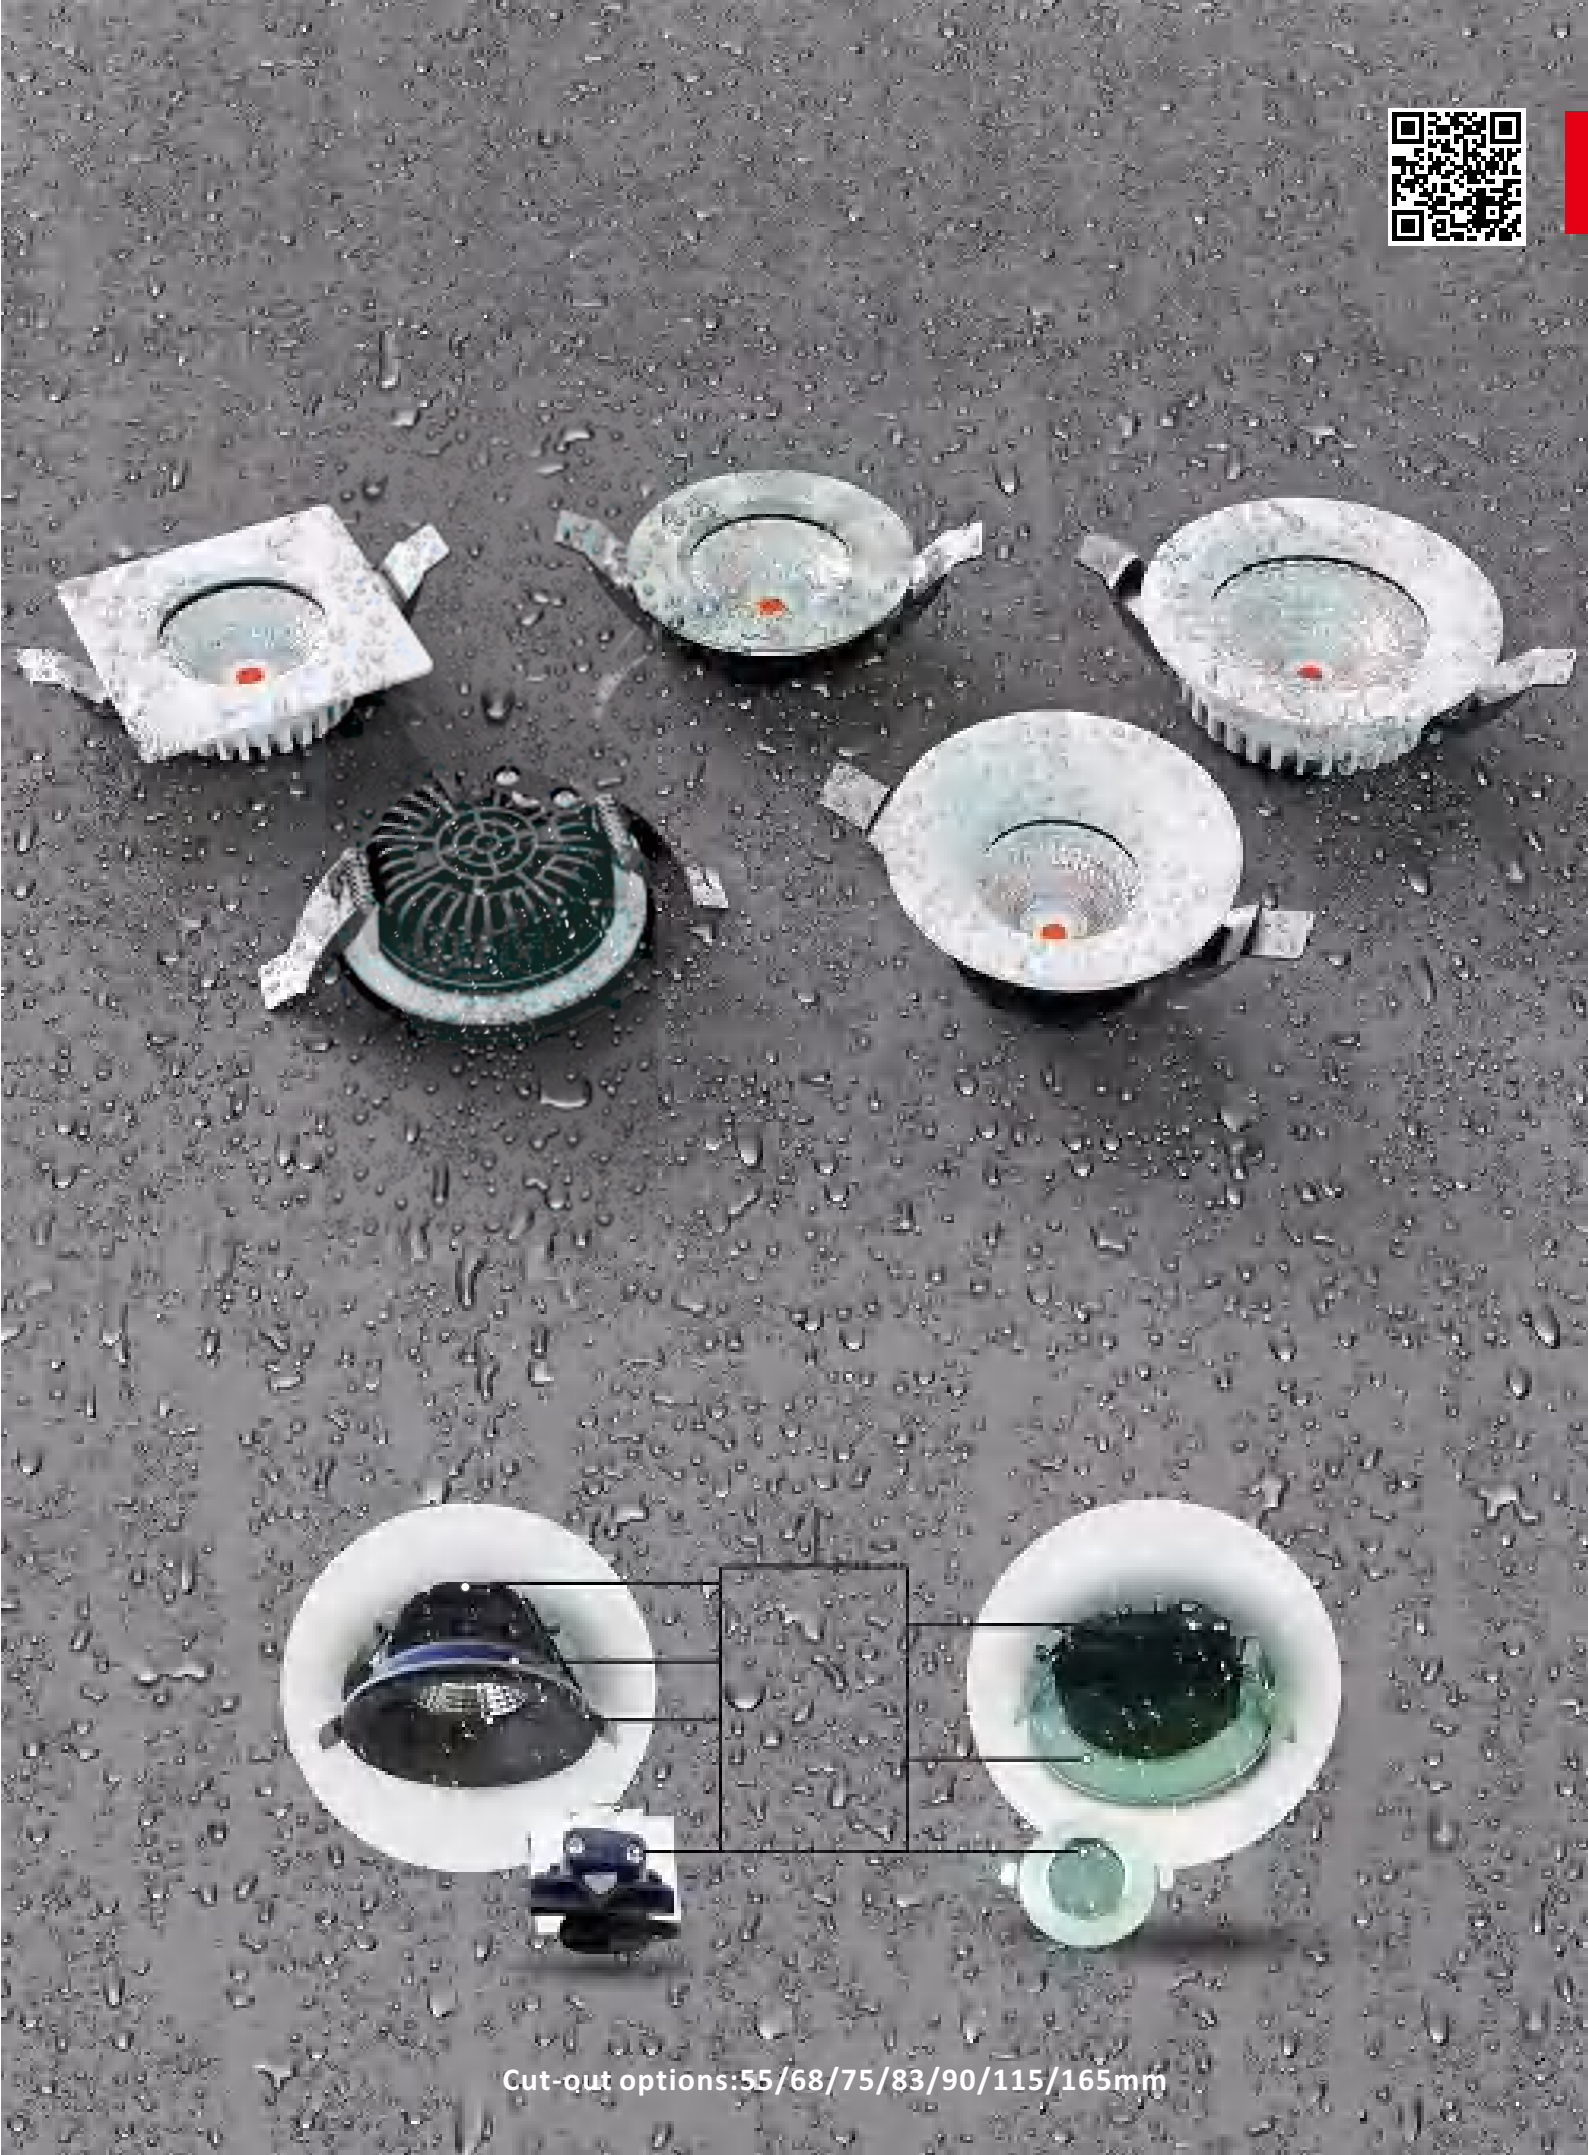

Cut-out options:55/68/75/83/90/115/165mm




SLIM ANTI-GLARE

WATERPROOF SPOTLIGHT



B0111-03/A1


Power	Cut-out	Lumen	CRI	IP Rating	Beam Angle
5W/7W	Ø55	90lm/w	90	IP54/IP65	24°/38°/60°





B0111-03/A2


Power	Cut-out	Lumen	CRI	IP Rating	Beam Angle
5W/7W/9W	Ø55	90lm/w	90	IP54/IP65	24°/38°/60°





B0111-03/A3

Power	Cut-out	Lumen	CRI	IP Rating	Beam Angle
5W/7W/9W	Ø55	90lm/w	90	IP54/IP65	24°/38°/60°






B0107-04/A1



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65/67	24/38/50/60°
5W	1800-2800K	300lm	95	21/54/65/67	24/38/50/60°
7W	2700/3000/4000K	600lm	90	21/54/65/67	24/38/50/60°
7W	1800-2800K	380lm	95	21/54/65/67	24/38/50/60°
9W	2700/3000/4000K	800lm	90	21/54/65/67	24/38/50/60°



2IN1


INSTALLATION SPOTLIGHT

A removable ring allows you to choose install with ring or without ring, that lead to surface mounted or recessed mounted effect.




SLIM WATERPROOF

NON-ADJUSTABLE SPOTLIGHT




B0101-07/A2

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65/67	24/38/50/60°
5W	1800-2800K	300lm	95	21/54/65/67	24/38/50/60°



B0101-01/A2

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21/54/65/67	24/38/50/60°
5W	1800-2800K	300lm	95	21/54/65/67	24/38/50/60°
7W	2700/3000/4000K	600lm	90	21/54/65/67	24/38/50/60°
7W	1800-2800K	380lm	95	21/54/65/67	24/38/50/60°
9W	2700/3000/4000K	800lm	90	21/54/65/67	24/38/50/60°



B0101-08/A2



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
8W	2700/3000/4000K	600lm	90	21/54/65/67	60°
8W	1800-2800K	380lm	95	21/54/65/67	60°
10W	2700/3000/4000K	900lm	90	21/54/65/67	60°
10W	1800-2800K	500lm	95	21/54/65/67	60°
12W	2700/3000/4000K	1100lm	90	21/54/65/67	60°
12W	1800-2800K	550lm	95	21/54/65/67	60°

HEAT DISSIPATION

Lines design make it has more space for heat dissipation, extend lifespan.



- Private mould,patented product
- Ultra slim and honeycomb mesh
- Internal and external driver option

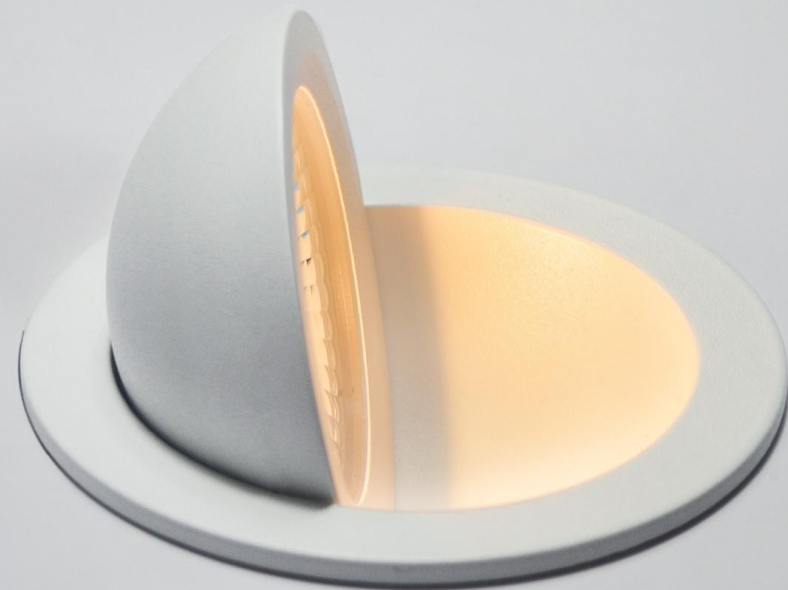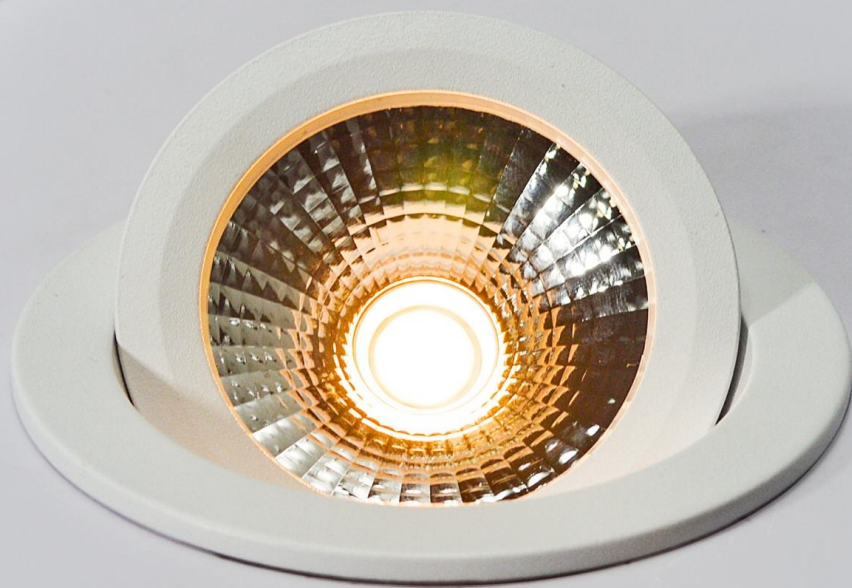




360° TILTABLE SPOTLIGHT
Can be used under insulation directly





B0103-02/A1

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	65	38°/90°
5W	1800-2800K	300lm	95	65	38°/90°
7W	2700/3000/4000K	600lm	90	65	38°/90°
7W	1800-2800K	380lm	95	65	38°/90°




B0103-02/A3

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
2*5W	2700/3000/4000K	900lm	90	65/67	38°/90°
2*5W	1800-2800K	600lm	95	65/67	38°/90°
2*7W	2700/3000/4000K	1200lm	90	65/67	38°/90°
2*7W	1800-2800K	760lm	95	65/67	38°/90°

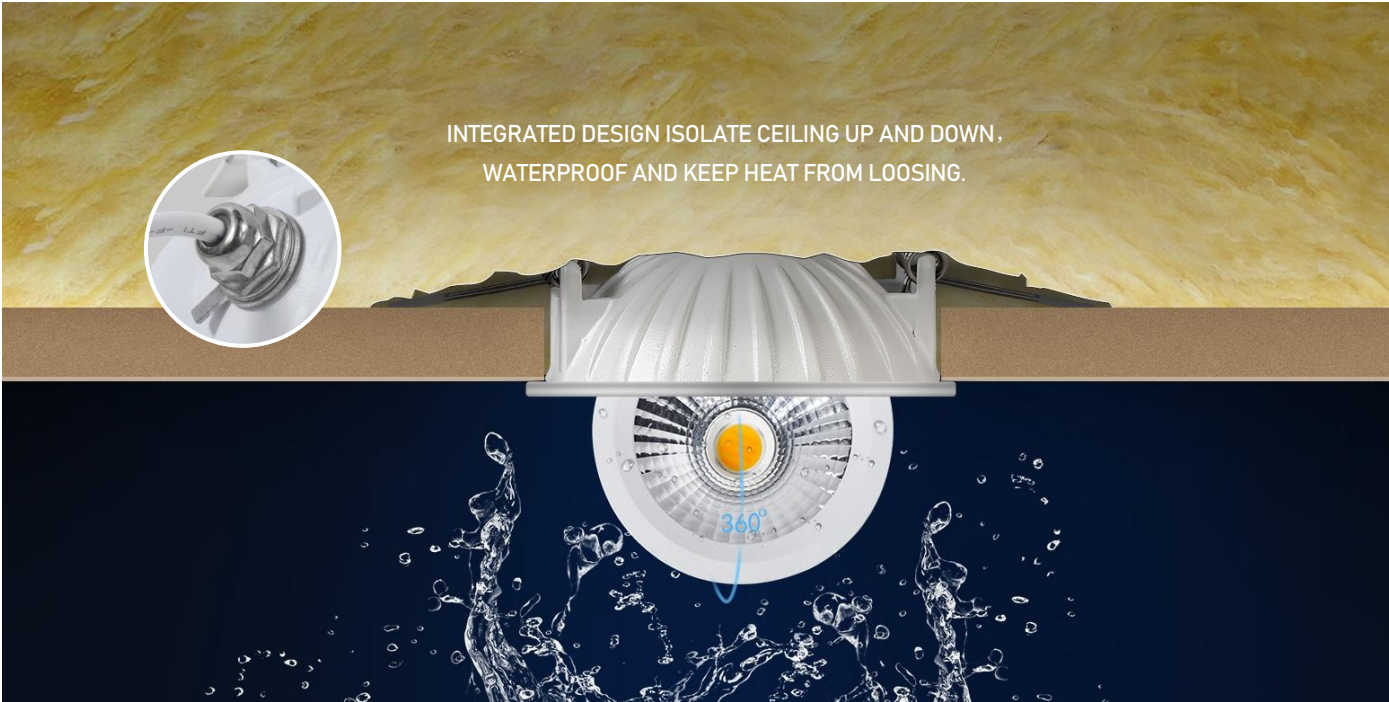

- 5year an 10year warranty
- IP21/ IP54 / IP65/ IP67
IP54 suitable for bathroom
IP65 suitable for Patio,Porch,Eave,Shower room
IP67 can be briefly immersed in water


Can be used under insulation directly





DRIVER INTEGRATED LED SPOTLIGHT

- Driver integrated, connect to 230V directly
- Installation height as slim as 23mm
- IP54 / IP 65 rating, suitable for bathroom
- Deep dimming, flicker-free;
- 5-year warranty
- Bleow items have driver internal option :

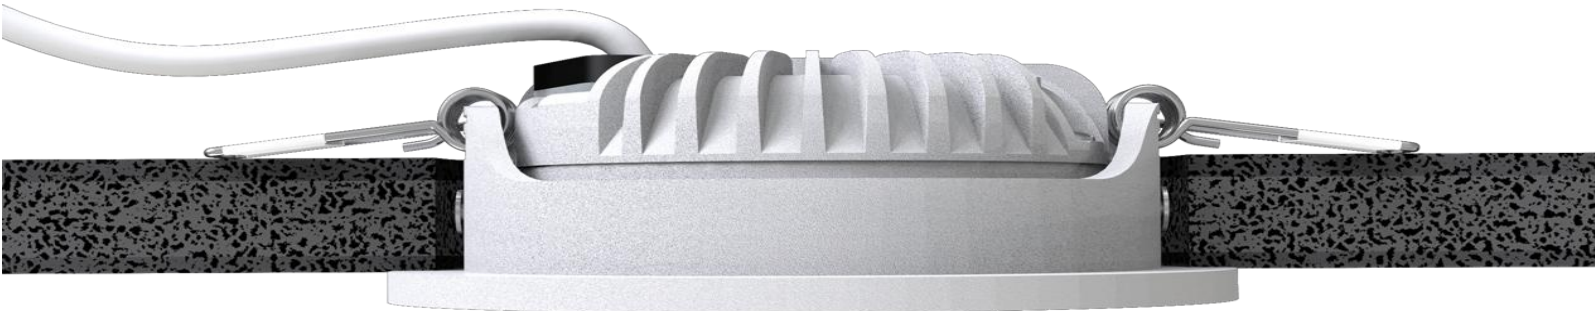

Connect to 230V directly

JUNCTION BOX WITH QUICK CONNECTOR

Two 15MM diameter wires can be connected at the same time
Compliance with national security standards of the Netherlands,
Sweden, Denmark, Norway, Finland and other European countries



BUILT-IN QUICK CONNECTOR

Dimmable power supply
Fast Installation, Save manual-work
Compliance with national security standards of the Netherlands
Sweden, Denmark, Norway, Finland and other European countries



Triac Dimmable



ECONOMY LIGHT

B0104-03/B1 (Adjustable Spotlight)

B0104-03/B2 (NO-adjustable Spotlight)

B0104-03/B3 (Downlight)

Power: 4.5W



Luminous Efficiency: 80~110 LM/W

CRI: 90

Beam angle: 24°/38°/60°/120°

Voltage: 220V/110V

IP Rating: 21/54



3 types Options

Ultra thin flat and anti Deep Anti-glare design

Multiple beam angle options

Installation height 23mm

Deep dimming, flicker-free





SUPERB SLIM LED CEILING LIGHT

5year and 10year warranty

IP21

IP54


IP65

IP67



Multiple Function

• Save stock • Save cost • Extension

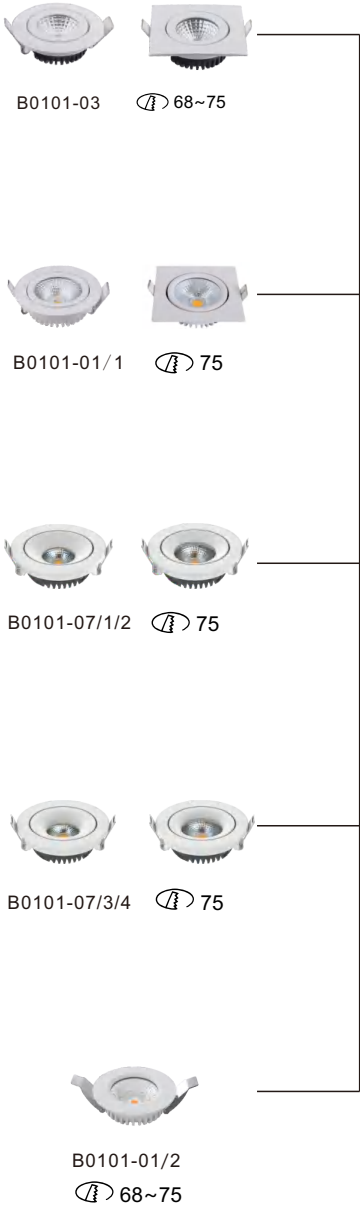




A13-09-104

Match with below item:

B0101-01/2.5F B0107-04 B0101-09






DIY Trimless Frame

B0202-02/K

Match with below item:



B0101-01/1	B0101-01/2	B0101-02/2
B0101-03	B0103-02	B0107-02/1
B0107-02/2	B0107-02/3	B0107-02/4
B0107-03	B0107-04	



B0202-02/K

Match with below item:

B0101-01/1	B0101-01/2	B0101-02/2
B0101-03	B0103-02	B0107-02/1
B0107-02/2	B0107-02/3	B0107-02/4
B0107-03	B0107-04	

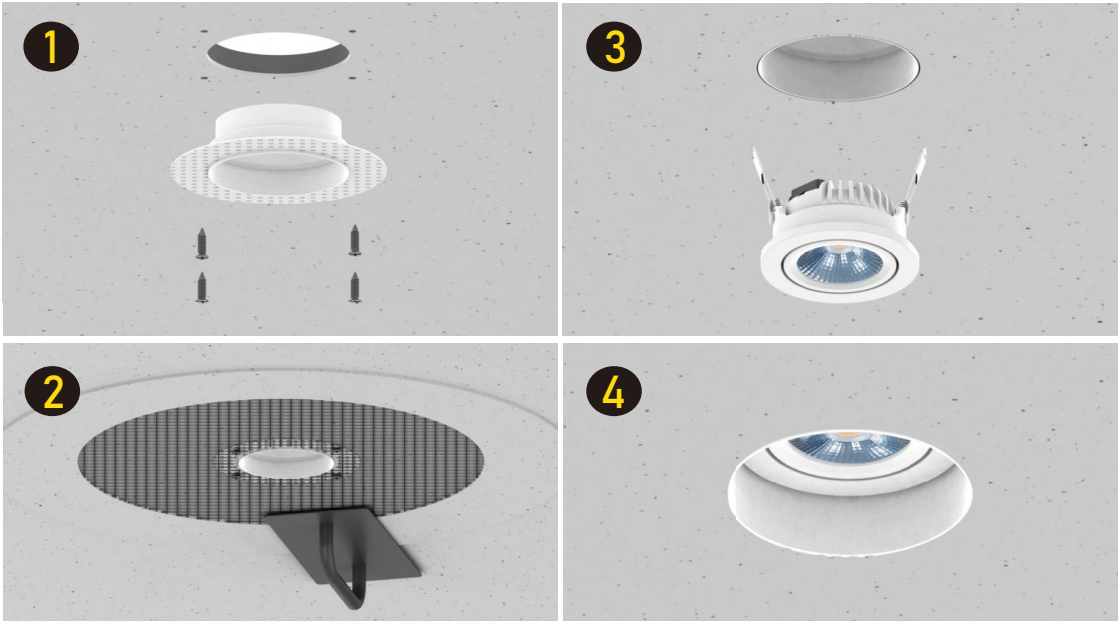


DIY EXTENSION RING SERIAL



B0202-01/C

Can cover Max.Ø85mm original holes.
Match with below items:



- | | | |
|------------|------------|------------|
| B0101-07/1 | B0101-07/2 | |
| B0107-01/1 | B0107-01/2 | B0107-01/3 |



B0202-02/H B0202-02/I

Can cover Max.Ø105mm original holes.
Match with below items:


- | | | |
|------------|------------|------------|
| B0101-01/1 | B0101-01/2 | B0101-02/2 |
| B0101-03 | B0103-02 | B0107-02/1 |
| B0107-02/2 | B0107-02/3 | B0107-02/4 |
| B0107-03 | B0107-04 | |



B0202-02/J

Can cover Max.Ø155mm original holes.
Match with below items:

- | | | |
|------------|------------|------------|
| B0101-01/1 | B0101-01/2 | B0101-02/2 |
| B0101-03 | B0103-02 | B0107-02/1 |
| B0107-02/2 | B0107-02/3 | B0107-02/4 |
| B0107-03 | B0107-04 | |



Hole is too big
to fit the spot?



Let the extension ring
to fix it!






DIY Surface Mounting Serial



B0202-02/A

Match with below item:


- | | | |
|------------|------------|------------|
| B0101-01/1 | B0101-01/2 | B0101-02/2 |
| B0101-03 | B0103-02 | B0107-02/1 |
| B0107-02/2 | B0107-02/3 | B0107-02/4 |
| B0107-03 | B0107-04 | |



B0202-01/A

Match with below item:


- B0101-07/1 B0101-07/2
B0107-01/1 B0107-01/2 B0107-01/3



B0202-02/C

Match with below item:


- | | | |
|------------|------------|------------|
| B0101-01/1 | B0101-01/2 | B0101-02/2 |
| B0101-03 | B0103-02 | B0107-02/1 |
| B0107-02/2 | B0107-02/3 | B0107-02/4 |
| B0107-03 | B0107-04 | |



B0202-02/B

Match with below item:

- B0101-01/1 B0101-01/2



HEAT SHIELD






B0202-05/A1 (Match:B0101-03)

CUT OUT:ø68~75mm



B0202-05/A2 (Match:B0101-01 B0101-05)

CUT OUT:ø75mm and ø75~83mm

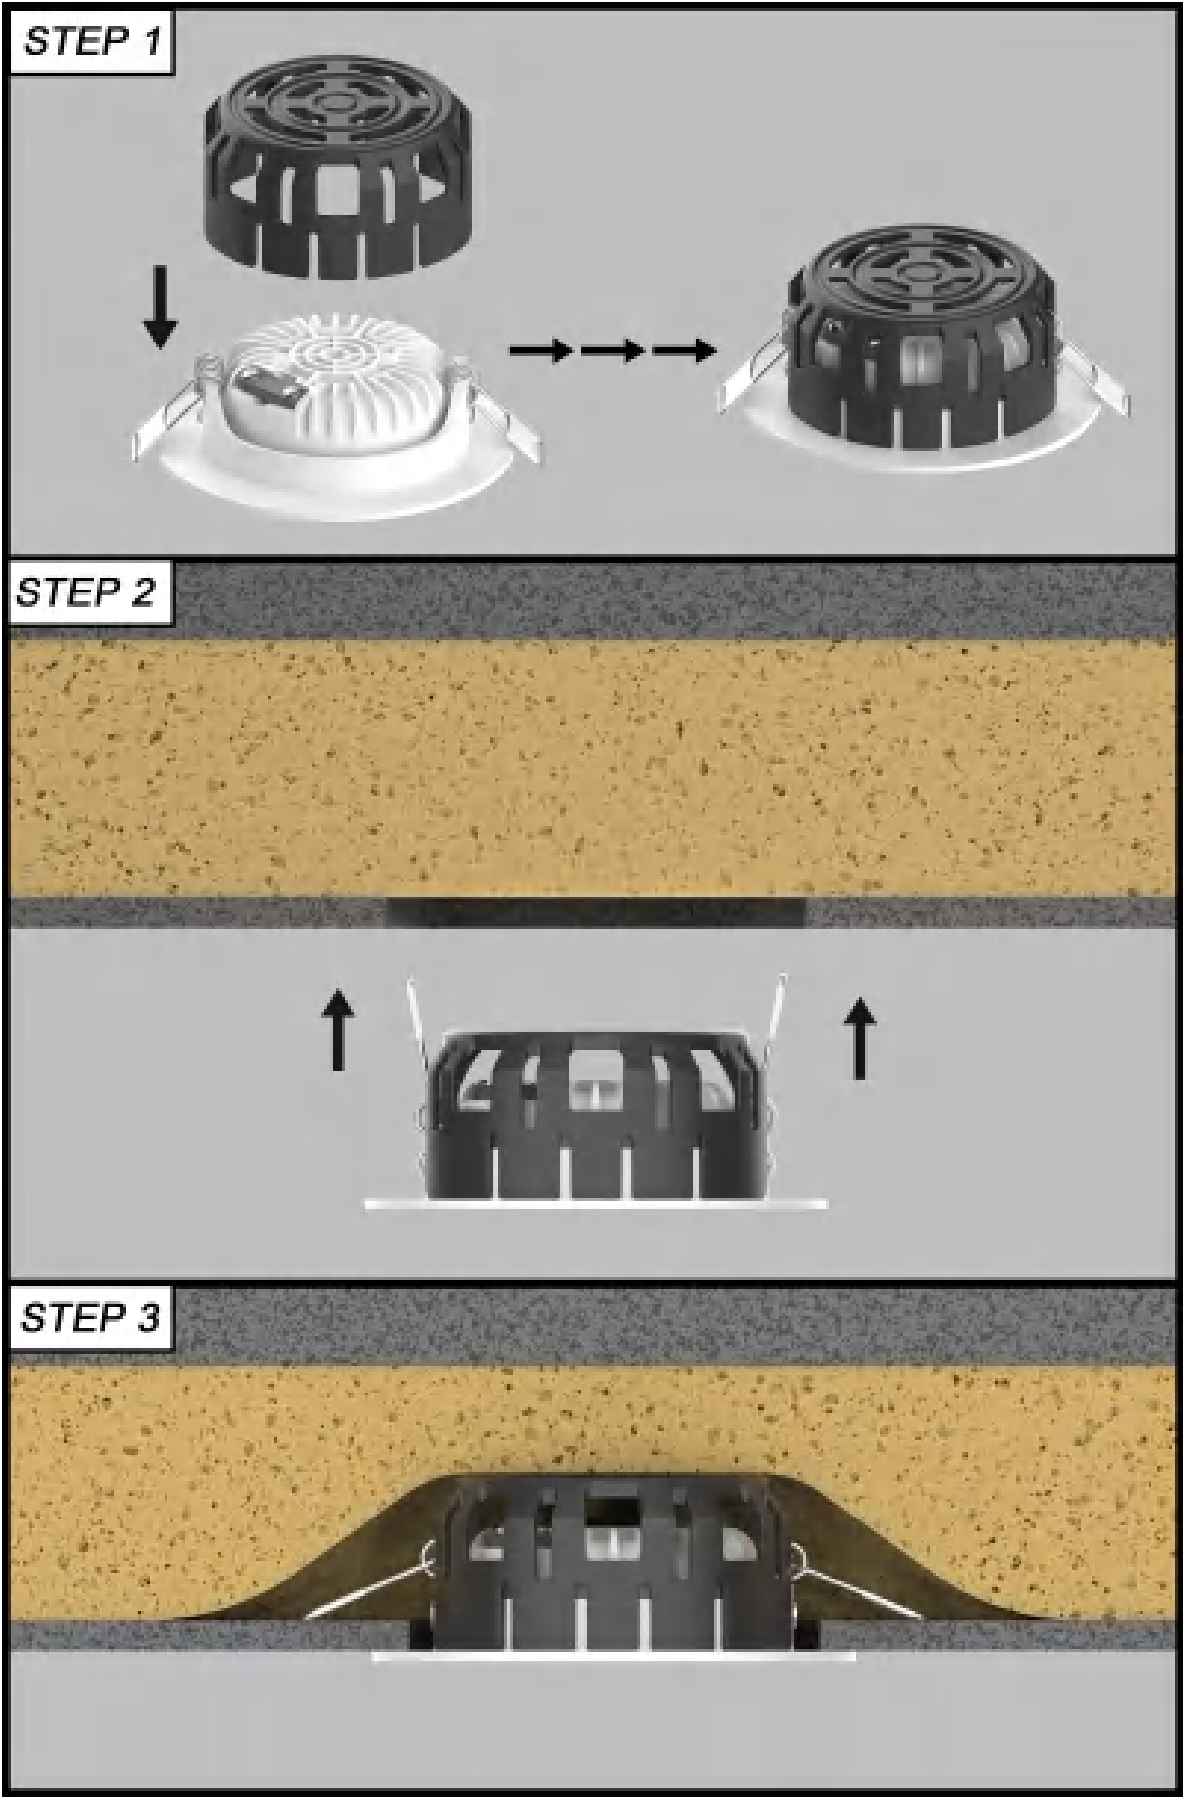

DIY Pendent Serial




Available Color:
Aluminum die-cast
White / Black

Item NO.: B0202-01/D

Compliance with below item:


- B0101-07/1
- B0101-07/2
- B0107-01/1
- B0107-01/2
- B0107-01/3

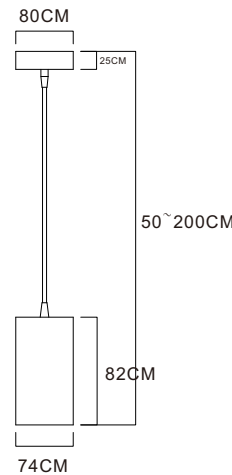

Item NO.: B0202-02/E

Compliance with below item:

- B0101-01/1
- B0101-01/2
- B0101-02/2
- B0101-03
- B0103-02
- B0107-02/1
- B0107-02/2
- B0107-02/3
- B0107-02/4
- B0107-03
- B0107-04

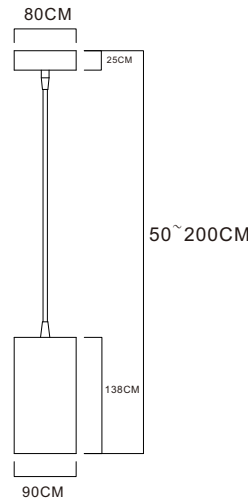




DIY TRACK LIGHT ACCESSORY

DIY RECESSED GIMBLE HOUSING



B0202-01/E

Match with below item:
B0101-07



B0202-04/B (CUT OUT: Ø55mm)


B0202-04/C (CUT OUT: Ø68~75mm)

Match with below item:
B0101-01 B0101-03 B0101-02
B0102-01 B0107-04 B0101-07




B0202-02/G

Match with below item:
B0101-01 B0101-03 B0101-02
B0102-01 B0107-04



B0202-02/F

Match with below item:
B0101-10 B0101-09







B0116-01/A



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
3W	2700/3000/4000K	250lm	90	21	15°/24°/38°/60°
5W	2700/3000/4000K	450lm	90	21	15°/24°/38°/60°

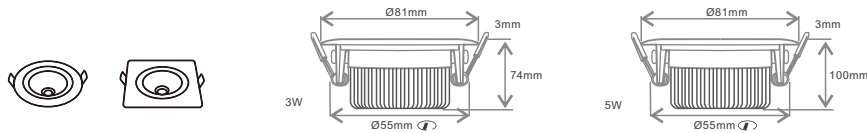


ANGLE ROTATION

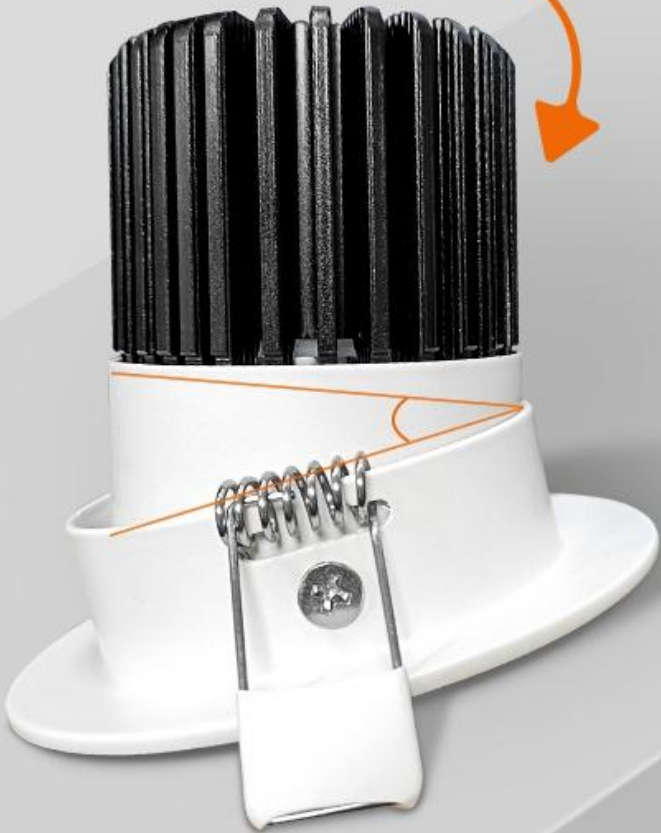

B0116-01/A



Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	2700/3000/4000K	450lm	90	21	15°/24°/38°/60°
5W	1800-2800K	300lm	95	21	15°/24°/38°/60°
7W	2700/3000/4000K	600lm	90	21	15°/24°/38°/60°
7W	1800-2800K	380lm	95	21	15°/24°/38°/60°
10W	2700/3000/4000K	900lm	90	21	15°/24°/38°/60°
10W	1800-2800K	540lm	95	21	15°/24°/38°/60°
12W	2700/3000/4000K	1080lm	90	21	15°/24°/38°/60°
12W	1800-2800K	650lm	95	21	15°/24°/38°/60°
15W	2700/3000/4000K	1080lm	90	21	15°/24°/38°/60°

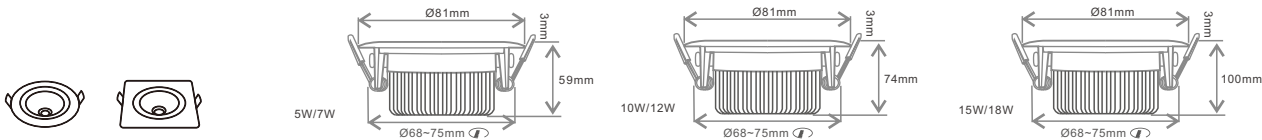



ECONOMY LIGHT



white




black



nickel


B0104-01/A1 2.5F

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
5W	3000/4000/6000K	300lm	90	21	100°




B0104-01/A2 3F

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
7W	3000/4000/6000K	700lm	90	21	100°
9W	3000/4000/6000K	900lm	90	21	100°



B0104-01/A3 4F

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
10W	3000/4000/6000K	1000lm	90	21	100°
12W	3000/4000/6000K	1200lm	90	21	100°



PRODUCT DISPLAY






ECONOMY LIGHT




B0104-01/A4 6F

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
15W	3000/4000/6000K	1500lm	90	21	100°
18W	3000/4000/6000K	1800lm	90	21	100°



B0104-01/A5 8F

Power	CCT	Lumen	CRI	IP Rating	Beam Angle
18W	3000/4000/6000K	1800lm	90	21	100°
20W	3000/4000/6000K	2000lm	90	21	100°





SOFT LAMPSHADE

Big light surface, high light efficiency soft & even light,
Eye-protection high ra>90, recover the original color.




B0103-01/A1 (PC+Aluminum)


B0103-01/B1 (Aluminum)

- Power: 7W/10W/12W
- Luminous Efficiency: 130 LM/W
- CRI: 90
- Beam angle: 98°
- Voltage: 220V/110V
- IP Rating: 21/54



- 90~110lm/w
- 2 power / 3cct
- Smooth dimming
- Flick-free and noise-free
- 5 years warranty options



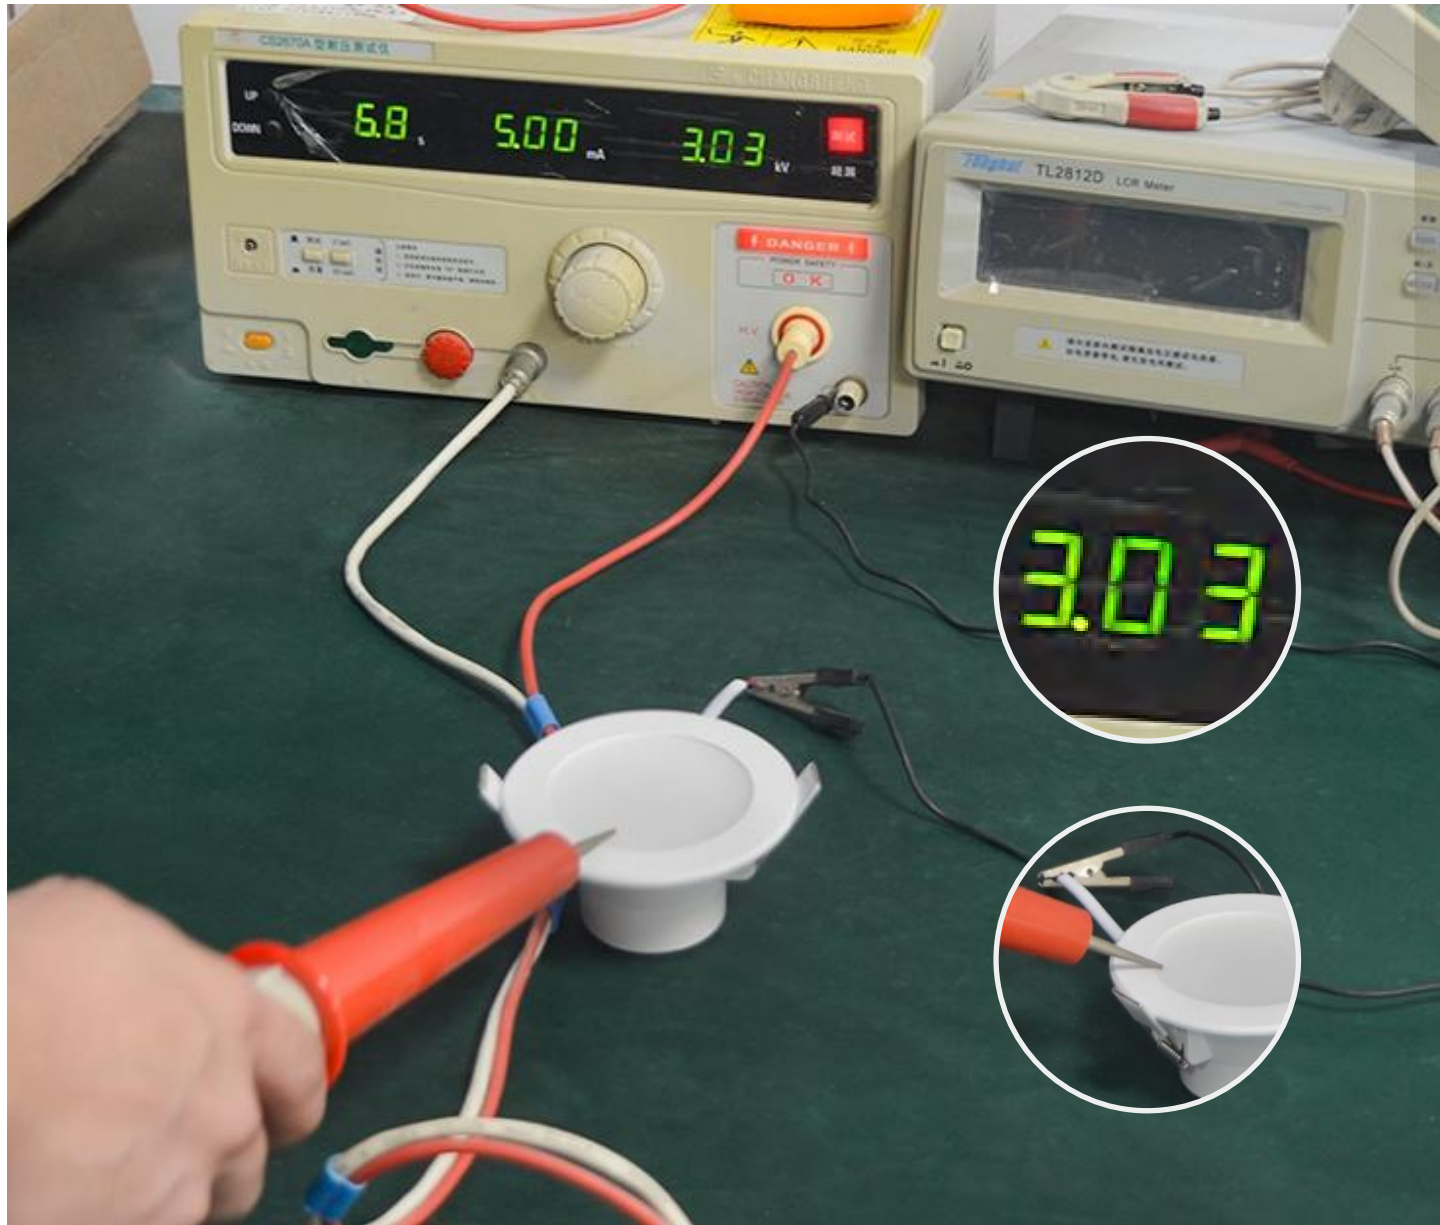

HIGH VOLTAGE TESTING

The light body can withstand 3000V high voltage,
protect users from electric leakage damage.

ECONOMY LIGHT



B0104-01/B1 2.5F(COB)



B0104-01/B2 3F(COB)

Power	Lumen	CRI	IP Rating	Beam Angle
5W	400lm	80	21	24°
7W	560lm	80	21	24°
10W	800lm	80	21	24°




B0104-01/C2 3F(SMD)



B0104-01/C1 2.5F(SMD)

Power	Lumen	CRI	IP Rating	Beam Angle
5W	400lm	80	21	24°
7W	560lm	80	21	24°
10W	800lm	80	21	24°

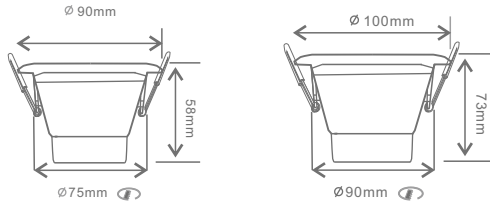

- 2 power / 3cct
- Smooth dimming
- Flick-free and noise-free
- 5 years warranty options

